

C2W

Static White
Wallwasher




Input Requirements

1600/1450 Lumens 120VAC/0.2A/23W
240VAC/0.2A/23W
277VAC/0.1A/23W

Project Name

Type

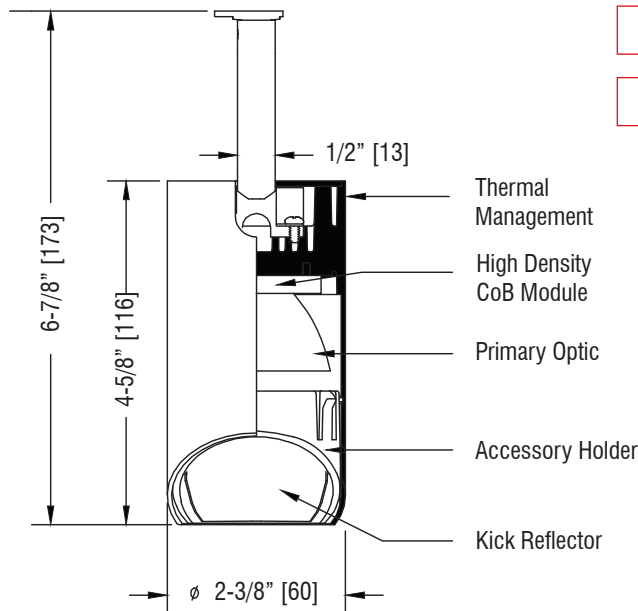

Enter Catalog Number Sequentially from Left to Right

C2W - - -

Model	Lumens/CRI	CCT	Adaptor	Dimming	Level	Options	Voltage	Finish
C2W	L16	1600/92	27	2700	9TC BusRun Clipless	E ELV 5 5%	P* Potentiometer	A 120 P White
	L14	1450/98	30	3000	9TD BusRun Deep	N Local	R** Rotation Lock	D 240 MB Black
			35	3500	9TS BusRun Shallow	W Wire-less	SP* Switch w/ Potentiometer	F* 240 BR Brushed
			40	4000			SR** Switch w/ Rotation Lock	C 277 CP Custom
			9HC	BusRun Clipless w/ Driverbox	E ELV 0 10%			
			9HD	BusRun Deep w/ Driverbox	N Local			
			9HS	BusRun Shallow w/ Driverbox	W Wire-less			
			BT	Basic Track	C Casambi			
					Z Avi-On			
					V Zigbee			
					Lutron Vive			
			ST2	2-Circuit Stucchi	E ELV 0 10%			
			ST3	3-Circuit Stucchi	N Local			
			3L	5" Canopy	Z 0-10 D Dark			
			5L	3.5" QC Canopy	M DMX			
			7L	2" QC Canopy (Remote Driver Only)	D DALI			
					L Lutron H HiLume			

Flush Fit BusRun Adaptor

Litelab's flush fit BusRun adaptor recesses entirely inside BusRun to provide a clean aesthetic. It is available with a Switch and Rotation Lock or On-Board Potentiometer for individual fixture dimming. BusRun fitters are available dimmable to 1% and can be dimmed proportionally using an ELV dimming system.

Dimming Note

This fixture is provided with LED Drivers suitable for the dimming protocol specified. Dimming performance may vary based on dimmer model or system being used. If exact dimming performance is required, Litelab recommends testing the Litelab fixture with the specified dimmer.

Accessories: See Page 5

- ☐ OL-DF-a Beam Softening Film
- ☐ OL-TD-a Beam Softening Lens
- ☐ OL-30x60-a Universal Spread Lens (Included)




251 Elm Street, Buffalo, NY 14203 USA
800-238-4120 | www.litelab.com



Edition Date: 07/14/2021

Fitter Guide


9TC* - 120/240/277v Recessed BusRun Fitter - ELV Dimmable Only - 1%

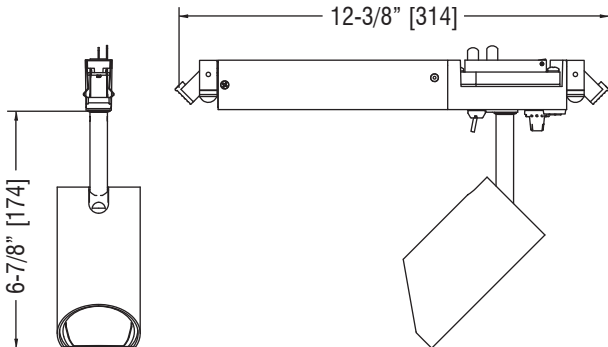


Universal Voltage Fitter, Available with an optional Switch and Rotation Lock or Potentiometer - Dimmable to 1%.

Switch not available for 277 V.


9H - Wireless Control Fitter for BusRun

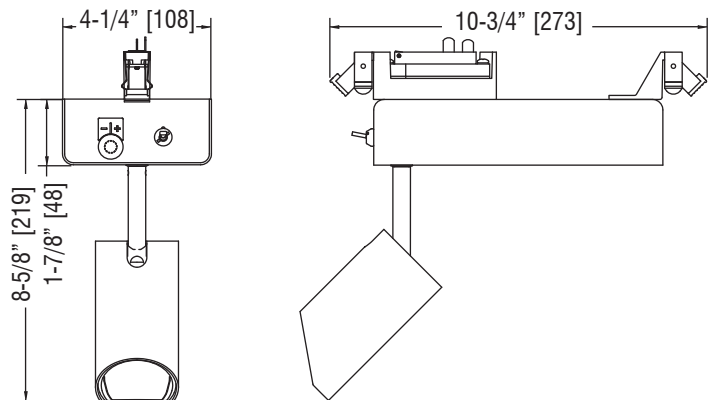


Basic Track - ELV Dimmable Fitter

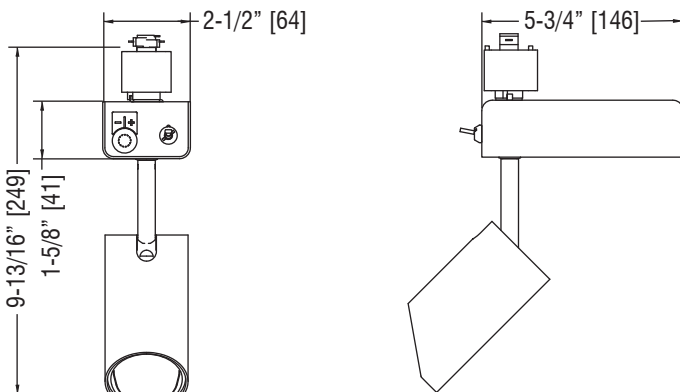

Stucchi - 2-Circuit ELV Dimmable Fitter

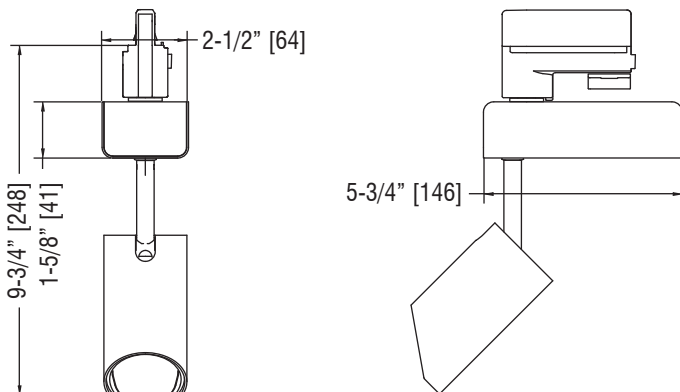


Stucchi - 2-Circuit 0-10V, DMX and Dali Dimmable Fitter

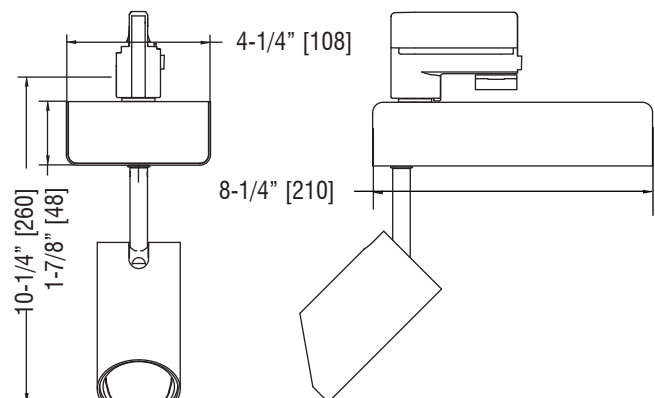


Fitter Guide


Stucchi - 3-Circuit ELV Dimmable Fitter

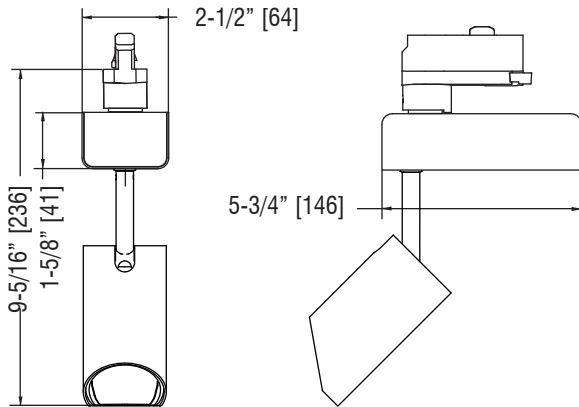

Stucchi - 3-Circuit 0-10V, DMX and Dali Dimmable Fitter

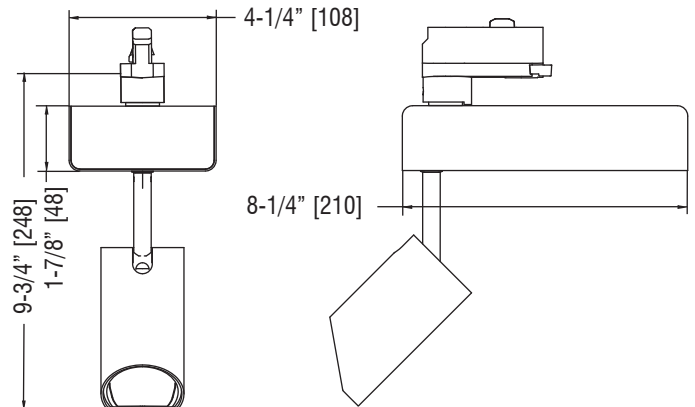


-5L - 3-1/2" Dia. Quick Connect Canopy

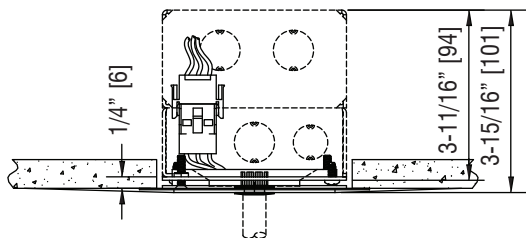


-5 Remote Driver
(1) 4" sq x 2-1/8" J-Box
(1) 4" sq x 1-1/2" Extension Box


-3L - 5" Dia. x 1/4" H. Machined Canopy

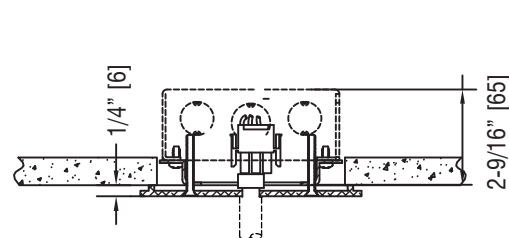


-3 Remote Driver
(1) 4" sq x 1-1/2" Extension Box

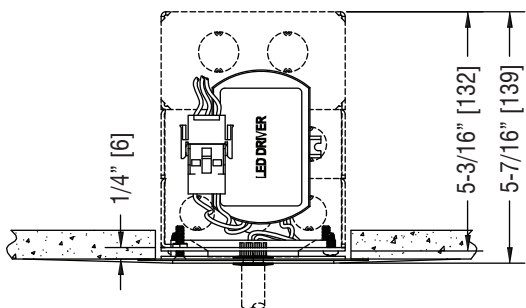


-5L ELV Driver
(1) 4" sq x 2-1/8" J-Box
(2) 4" sq x 1-1/2" Extension Box

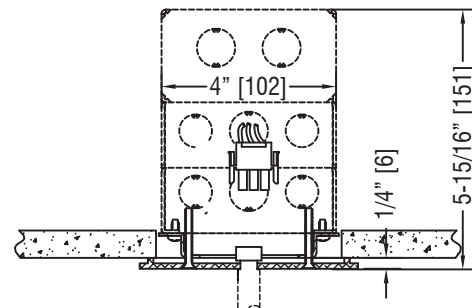

-3L ELV Driver
(1) 4" sq x 2-1/8" J-Box
(2) 4" sq x 1-1/2" Extension Box

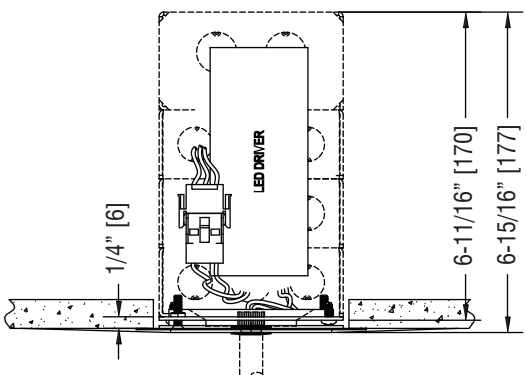


-5L 0-10v, DALI and DMX Driver
(1) 4" sq x 2-1/8" J-Box
(3) 4" sq x 1-1/2" Extension Box

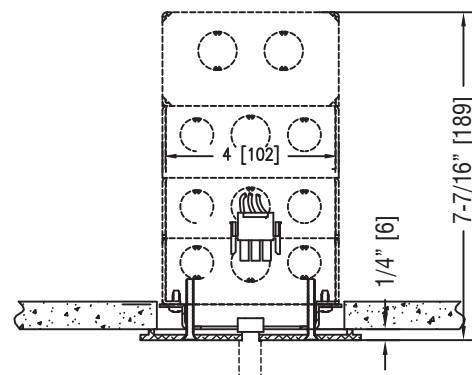

-3L 0-10v, DALI and DMX Driver
(1) 4" sq x 2-1/8" J-Box
(3) 4" sq x 1-1/2" Extension Box

Photometrics

C2W-L16 Wallwash

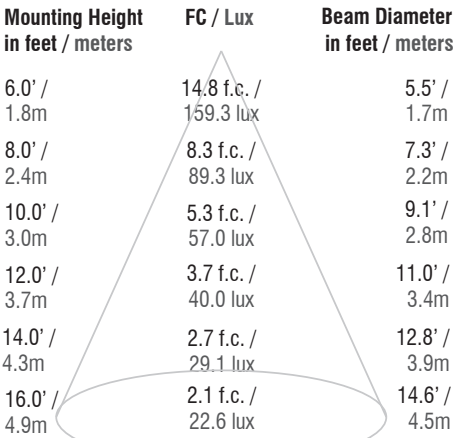


CBCP:	See Candela Distribution		
Efficacy:	47.9 lm/w		
Delivered Lumens:	623 lm		
Plane:	0°	90°	180°
Spacing Criteria:	0.93	1.03	0.72

CANDELA DISTRIBUTION

	0.0	45.0	90.0	135.0	180.0	FLUX
0	534	534	534	534	534	
5	530	532	532	527	523	50
15	479	500	493	434	403	130
25	357	408	402	292	235	160
35	217	280	283	160	101	137
45	118	162	162	31	9	82
55	59	79	55	3	0	38
65	29	32	13	1	0	16
75	12	11	3	0	0	6
85	5	4	1	0	0	2
90	3	2	0	0	0	0
95	2	2	0	0	0	1
105	1	1	0	0	0	0
115	0	0	0	0	0	0
125	0	0	0	0	0	0
135	0	0	0	0	0	0
145	0	0	0	0	0	0
155	0	0	0	0	0	0
165	0	0	0	0	0	0
175	0	0	0	0	0	0
180	0	0	0	0	0	0

C2W-L16 Wallwash- Polar Diagram

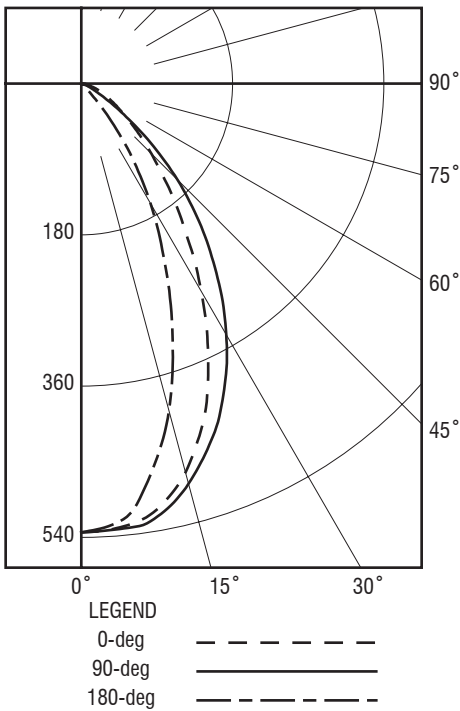

C2W

Static White
Wallwasher

Project Name

Type

Accessories

CUSTOM DISTRIBUTION FILMS AVAILABLE ON REQUEST.



SIZE CODE A: 1.95" [50MM]

DIFFUSION FILM: 0.25MM (0.01") FILM SOFTENS BEAM EDGES

TEXTURED DIFFUSION LENS: 3MM (0.1") TEXTURED LENS SOFTENS BEAM EDGES



OL-DF-A (DIFFUSION FILM)

DISTRIBUTION DIAGRAM





OL-TD-A (POLYCARBONATE DIFFUSION LENS)

DISTRIBUTION DIAGRAM



UNIVERSAL SPREAD LENS: 3MM (0.1") LENS SPREADS LIGHT UNIVERSALLY FOR WIDER DISTRIBUTION

OL-60x30-A (UNIVERSAL SPREAD LENS - INCLUDED)



251 Elm Street, Buffalo, NY 14203 USA
800-238-4120 | www.litelab.com

