

C3W

Static White
Wallwasher


Project Name

Type



Input Requirements

1800/1550 Lumens	120VAC/0.19A/23W
	240VAC/0.12A/25W
	277VAC/0.10A/25W
1300/1100 Lumens	120VAC/0.15A/19W
	240 VAC/0.08A/19W
	277 VAC/0.07A/19W

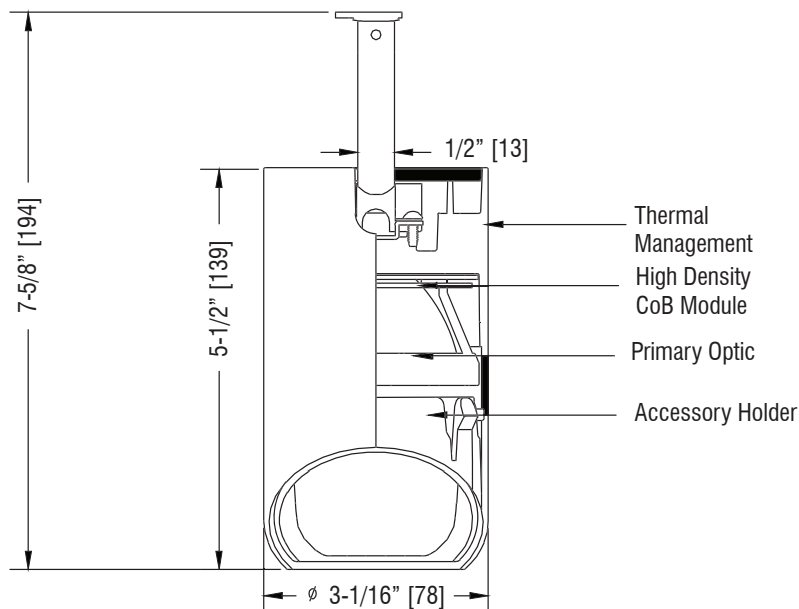

Enter Catalog Number Sequentially from Left to Right

C3W - - -

Model	Lumens/CRI	CCT	Adaptor	Dimming	Level	Options	Voltage	Finish
C3W	L18 1800/92	27 2700	9TC BusRun Clipless	E ELV	1 1%	P* Potentiometer	A 120	P White
	L15 1550/98	30 3000	9TD BusRun Deep			R** Rotation Lock	D 240	MB Black
	L13 1300/92	35 3500	9TS BusRun Shallow			SP* Switch w/ Potentiometer	F* 240	BR Brushed
	L11 1100/98	40 4000				SR** Switch w/ Rotation Lock	C 277	CP Custom
			9HC BusRun Clipless w/ Driverbox	E ELV	0 10%	* Potentiometers are available on ELV dimmable or non-dimming circuits only. ** Rotation Lock and type "F" voltage are exclusive to 9T fitters. Rotation Lock is not available with Potentiometer.		
			9HD BusRun Deep w/ Driverbox	W Wire-less	C Casambi			
			9HS BusRun Shallow w/ Driverbox		A Avi-On			
			Basic Track		Z Zigbee			
			ST2 2-Circuit Stucchi	E ELV	0 10%			
			ST3 3-Circuit Stucchi	Z 0-10	1 1%			
			3L 5" Canopy	M DMX	D Dark			
			5L 3.5" QC Canopy	D DALI				
			7L 2" QC Canopy (Remote Driver Only)					

Flush Fit BusRun Adaptor

Litelab's flush fit BusRun adaptor recesses entirely inside BusRun to provide a clean aesthetic. It is available with a Switch and Rotation Lock or On-Board Potentiometer for individual fixture dimming. BusRun fitters are available dimmable to 1% and can be dimmed proportionally using an ELV dimming system.

Dimming Note

This fixture is provided with LED Drivers suitable for the dimming protocol specified. Dimming performance may vary based on dimmer model or system being used. If exact dimming performance is required, Litelab recommends testing the Litelab fixture with the specified dimmer.

Accessories: See Page 5

- ☐ OL-DF-g Beam Softening Film
- ☐ OL-TD-g Beam Softening Lens
- ☐ OL-30x60-g Universal Spread Lens (Included)




251 Elm Street, Buffalo, NY 14203 USA
800-238-4120 | www.litelab.com



Edition Date: 07/14/2021

Fitter Guide


9TC* - 120/240/277v Recessed BusRun Fitter - ELV Dimmable Only - 1%

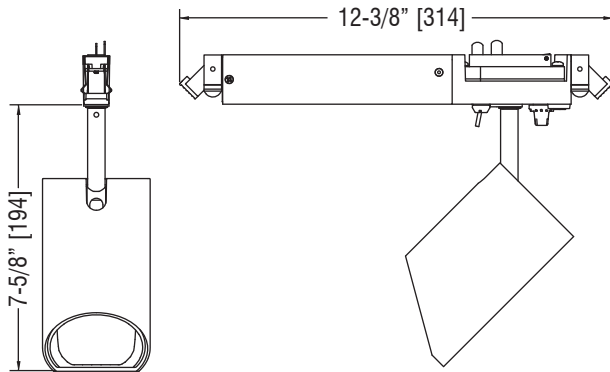


Universal Voltage Fitter, Available with an optional Switch and Rotation Lock or Potentiometer - Dimmable to 1%.

Switch not available for 277 V.


9H - Wireless Control Fitter for BusRun

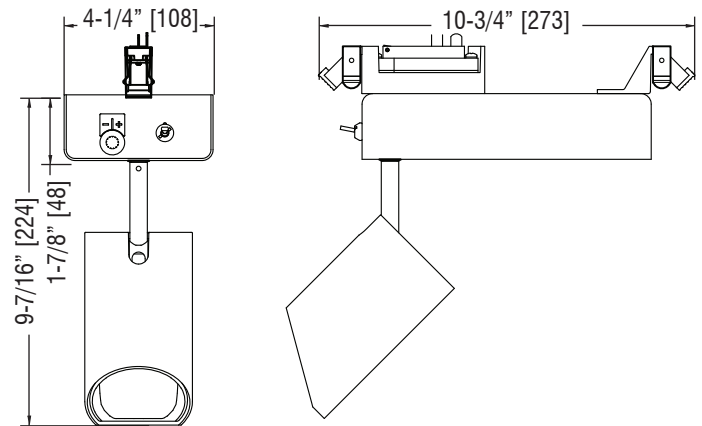


Stucchi - 2-Circuit ELV Dimmable Fitter

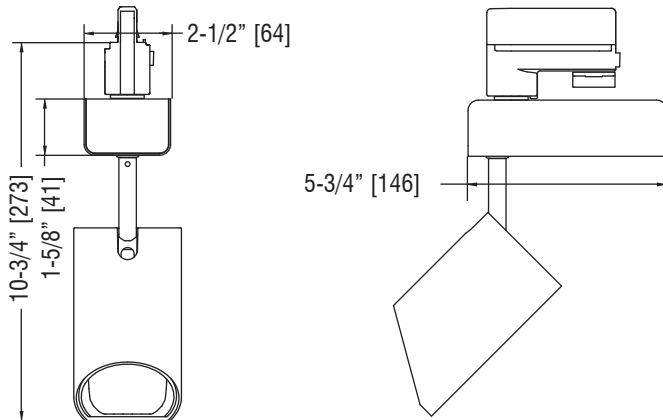


Stucchi - 2-Circuit 0-10V, DMX and Dali Dimmable Fitter

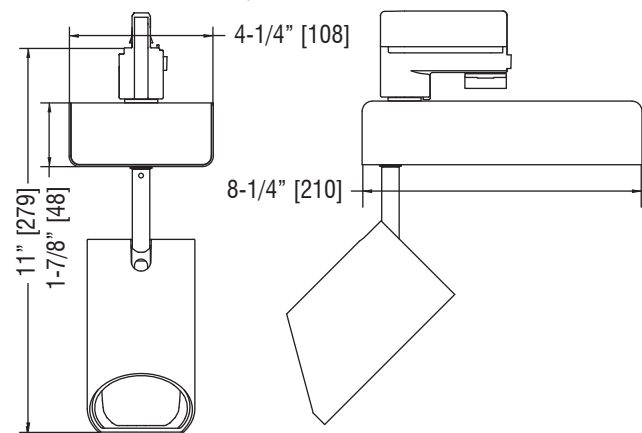

Stucchi - 3-Circuit ELV Dimmable Fitter

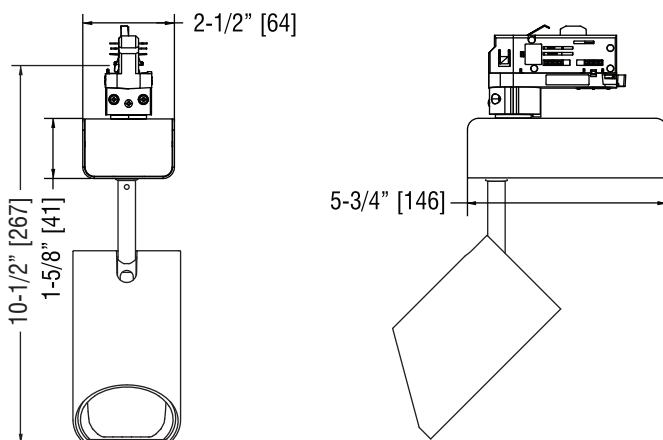


Stucchi - 3-Circuit 0-10V, DMX and Dali Dimmable Fitter

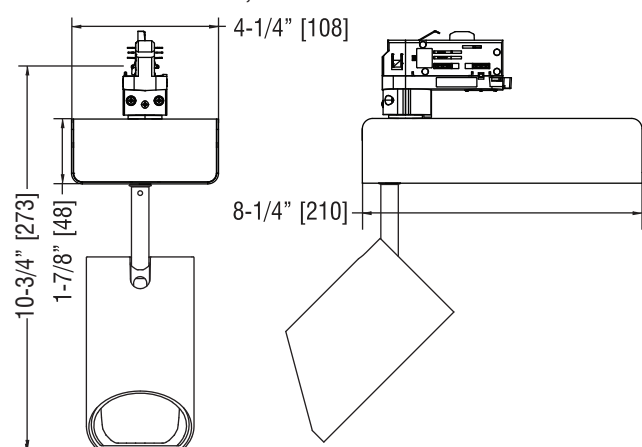

Fitter Guide


-7L - 2" Dia. Quick Connect Canopy - Gypsum*

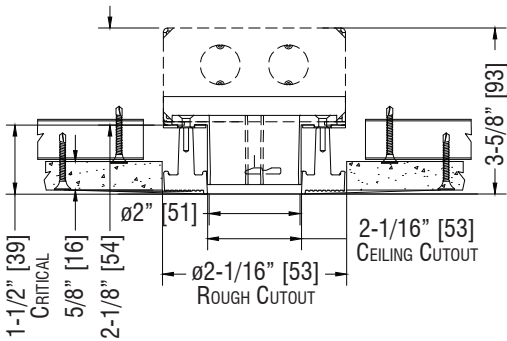

-7 Remote Driver
(1) 4" sq x 2-1/8"
J-Box

* QC-7K-GYP-P/MB
Canopy Mount ordered
separately.


-7L - 2" Dia. Quick Connect Canopy - Wood**

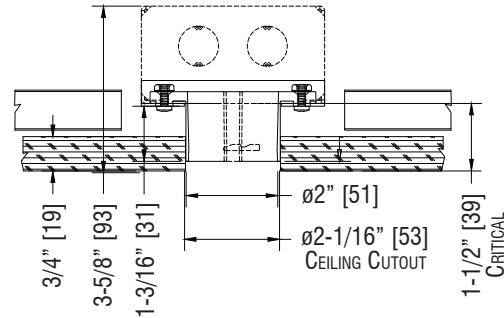

-7 Remote Driver
(1) 4" sq x 2-1/8"
J-Box


** QC-7K-WD-MB Canopy
Mount ordered separately.

-5L - 3-1/2" Dia. Quick Connect Canopy

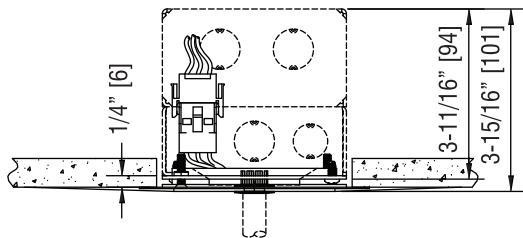


-5 Remote Driver
(1) 4" sq x 2-1/8"
J-Box
(1) 4" sq x 1-1/2"
Extension Box


-3L - 5" Dia. x 1/4" H. Machined Canopy QC-5K-P/MB Canopy Mounted Ordered Separately

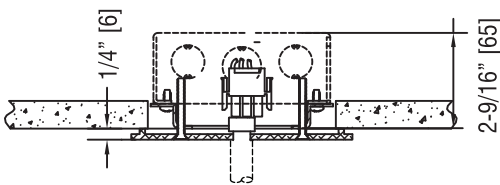


-3 Remote Driver
(1) 4" sq x 1-1/2"
Extension Box

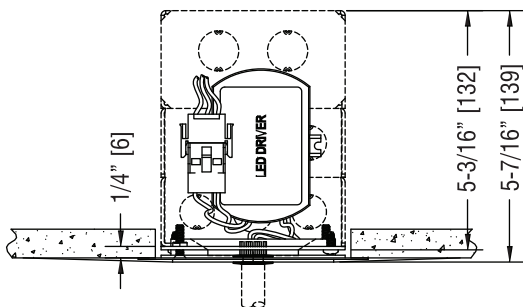


-5L ELV Driver
(1) 4" sq x 2-1/8"
J-Box
(2) 4" sq x 1-1/2"
Extension Box

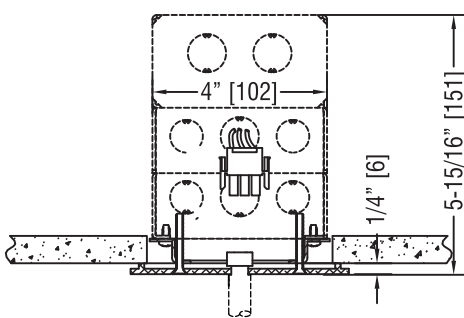

-3L ELV Driver
(1) 4" sq x 2-1/8"
J-Box
(2) 4" sq x 1-1/2"
Extension Box

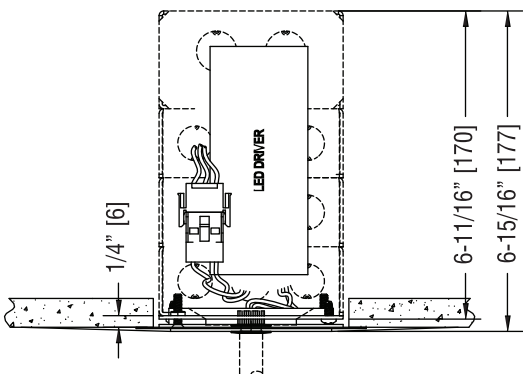

**-5L 0-10v, DALI
and DMX Driver**
(1) 4" sq x 2-1/8"
J-Box
(3) 4" sq x 1-1/2"
Extension Box

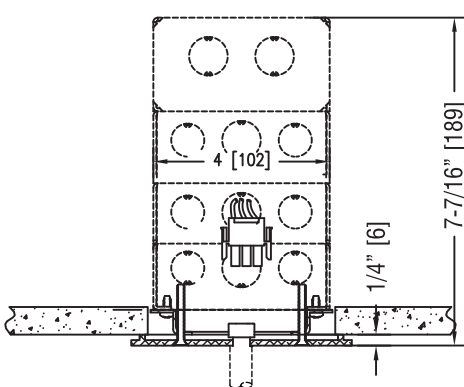

**-3L 0-10v, DALI
and DMX Driver**
(1) 4" sq x 2-1/8"
J-Box
(3) 4" sq x 1-1/2"
Extension Box

Photometrics

C3W-L18 Wallwash


Mounting Height in feet / meters	FC / Lux	Beam Diameter in feet / meters
6.0' / 1.8m	34.7 f.c. / 373.5 lux	5.3' / 1.6m
8.0' / 2.4m	19.5 f.c. / 210 lux	7.1' / 2.2m
10.0' / 3.0m	12.5 f.c. / 134.5 lux	8.9' / 2.7m
12.0' / 3.7m	8.7 f.c. / 93.6 lux	10.7' / 3.3m
14.0' / 4.3m	6.4 f.c. / 69 lux	12.5' / 3.8m
16.0' / 4.9m	4.9 f.c. / 52.7 lux	14.2' / 4.3m

CBCP:	See Candela Distribution		
Efficacy:	66.0 lm/w		
Delivered Lumens:	1392 lm		
Plane:	0°	90°	180°
Spacing Criteria:	0.95	0.96	0.74

CANDELA DISTRIBUTION

	0.0	45.0	90.0	135.0	180.0	FLUX
0	1248	1248	1248	1248	1248	
5	1244	1242	1229	1226	1227	115
15	1138	1108	1067	1007	982	295
25	853	916	871	631	614	362
35	535	652	627	417	246	321
45	249	364	346	33	0	179
55	122	189	79	1	0	76
65	56	73	8	0	0	28
75	24	21	2	0	0	10
85	10	7	0	0	0	3
90	6	4	0	0	0	0
95	4	2	0	0	0	1
105	2	1	0	0	0	0
115	1	0	0	0	0	0
125	0	0	0	0	0	0
135	0	0	0	0	0	0
145	0	0	0	0	0	0
155	0	0	0	0	0	0
165	0	0	0	0	0	0
175	0	0	0	0	0	0
180	0	0	0	0	0	0

C3W-L18 Wallwash- Polar Diagram

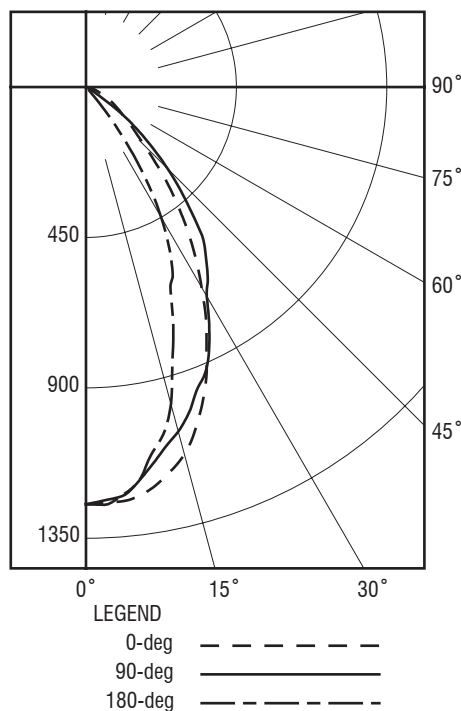

Accessories

CUSTOM DISTRIBUTION FILMS AVAILABLE ON REQUEST.

SIZE CODE G: 2.529" [64MM]



OL-DF-G (DIFFUSION FILM)

DIFFUSION FILM: 0.25MM (0.01") FILM SOFTENS BEAM EDGES (FOR USE WITH MULTIPLE MEDIA)



OL-TD-G (POLYCARBONATE DIFFUSION LENS)

DIFFUSION FILM: 3MM (0.1") TEXTURED LENS SOFTENS BEAM EDGES (FOR STANDALONE USE)

DISTRIBUTION DIAGRAM



DISTRIBUTION DIAGRAM



OL-30x60-G (UNIVERSAL SPREAD LENS - INCLUDED)

UNIVERSAL SPREAD LENS: 3MM (0.1") LENS SPREADS LIGHT UNIVERSALLY FOR WIDER DISTRIBUTION

DISTRIBUTION DIAGRAM

