

C3W

High Output
Tunable White
Wallwasher


Project Name

Type



Input Requirements

1900 Lumens 120VAC/0.2A/23W
 240VAC/0.2A/24W
 277VAC/0.2A/25W

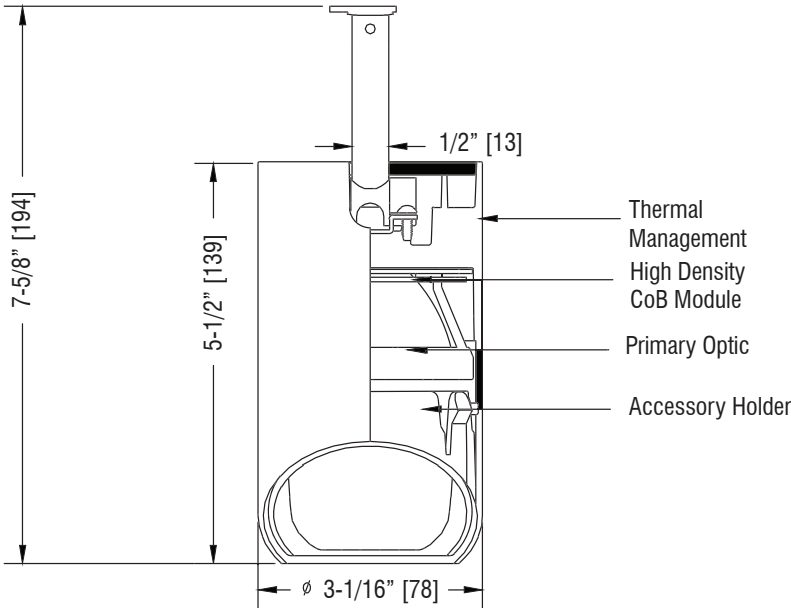

Enter Catalog Number Sequentially from Left to Right

C3W

-

-

-

Model	Lumens/CRI	CCT	Adaptor	Dimming	Level	Options	Voltage	Finish
C3W	L19	1900/92	TL 18-40 TH 27-65	9HC BusRun Clipless w/ Driverbox 9HD BusRun Deep w/ Driverbox 9HS BusRun Shallow w/ Driverbox	W Wire-less C Casambi A Avi-On	S N	Switch None A 120 D 240 F* 240 (2-Circuit) C 277	P White MB Black BR Brushed CP Custom
ST2 2-Circuit Stucchi ST3 3-Circuit Stucchi 3L 5" Canopy 5L 3.5" QC Canopy 7L 2" QC Canopy (Remote Driver Only) M DMX D DALI Z 0-10 D Dark								
ENTER RAL OR OTHER FINISH CODE								

Flush Fit BusRun Adaptor
Litelab's flush fit BusRun adaptor recesses entirely inside BusRun to provide a clean aesthetic. It is available with a Switch and Rotation Lock or On-Board Potentiometer for individual fixture dimming. BusRun fitters are available dimmable to 1% and can be dimmed proportionally using an ELV dimming system.

Dimming Note
This fixture is provided with LED Drivers suitable for the dimming protocol specified. Dimming performance may vary based on dimmer model or system being used. If exact dimming performance is required, Litelab recommends testing the Litelab fixture with the specified dimmer.

Accessories: See Page 6

☐ OL-DF-g
☐ OL-TD-g
☐ OL-30x60-g

Beam Softening Film
Beam Softening Lens
Universal Spread Lens
(Included)




251 Elm Street, Buffalo, NY 14203 USA
800-238-4120 | www.litelab.com




Fitter Guide


9H - Wireless Control Fitter for BusRun

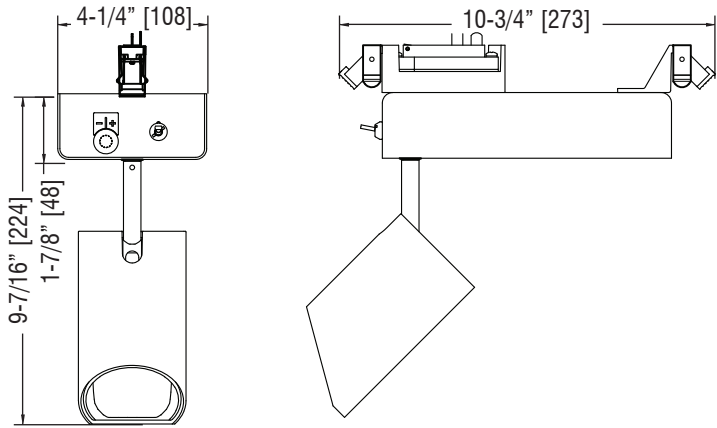

Stucchi - 2-Circuit DMX and Dali Dimmable Fitter

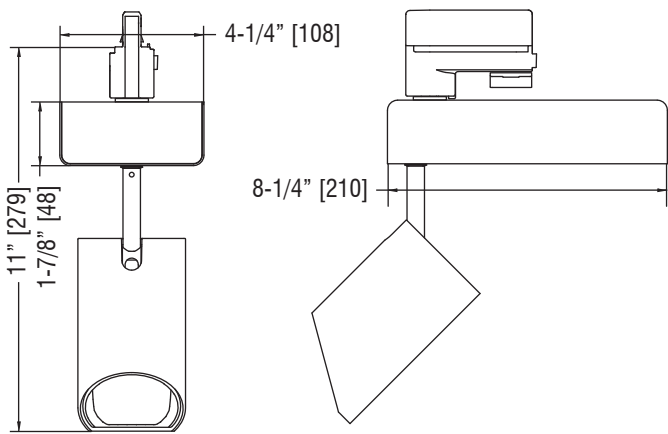


Stucchi - 3-Circuit 0-10V, DMX and Dali Dimmable Fitter

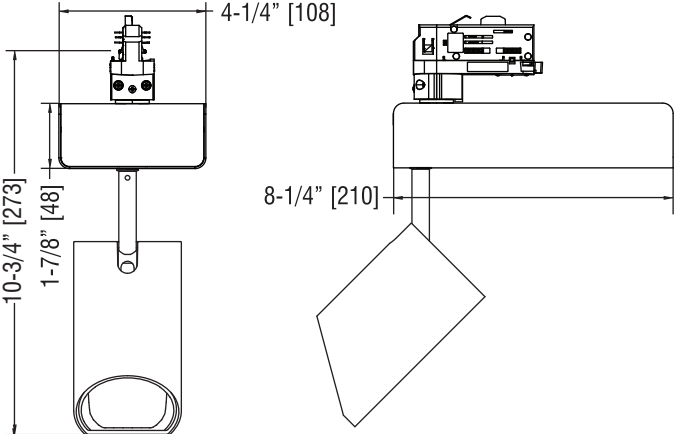

Fitter Guide


-7L - 2" Dia. Quick Connect Canopy - Gypsum*

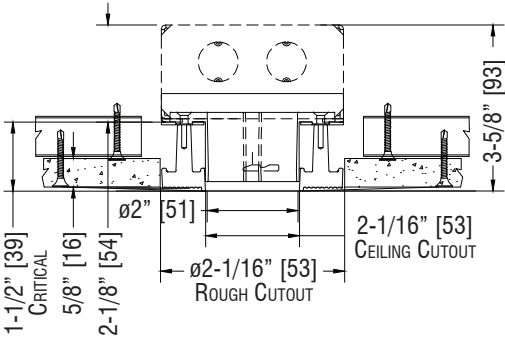

-7 Remote Driver
(1) 4" sq x 2-1/8"
J-Box

* QC-7K-GYP-P/MB
Canopy Mount ordered
separately.


-7L - 2" Dia. Quick Connect Canopy - Wood**

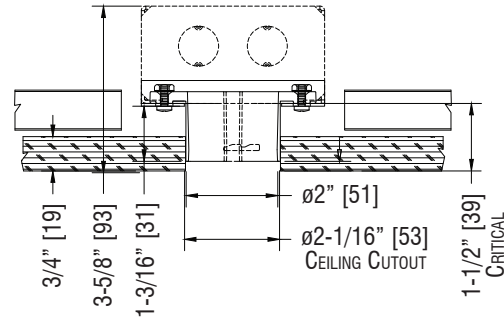

-7 Remote Driver
(1) 4" sq x 2-1/8"
J-Box


** QC-7K-WD-MB Canopy
Mount ordered separately.

-5L - 3-1/2" Dia. Quick Connect Canopy - Remote Driver QC-5K-P/MB Canopy Mounted Ordered Separately

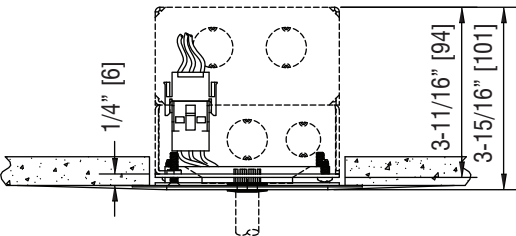


-5 Remote Driver
(1) 4" sq x 2-1/8"
J-Box
(1) 4" sq x 1-1/2"
Extension Box

-3L - 5" Dia. x 1/4" H. Machined Canopy - Remote Driver

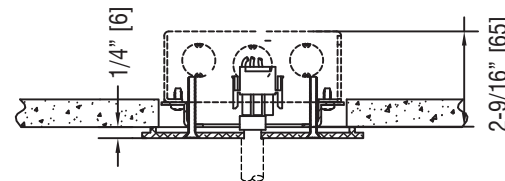


-3 Remote Driver
(1) 4" sq x 1-1/2"
Extension Box

-5L - 3-1/2" Dia. Quick Connect Canopy - Integral Driver

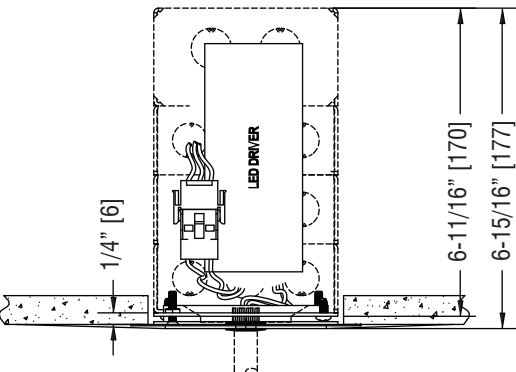

**-5L 0-10v, DALI
and DMX Driver**
(1) 4" sq x 2-1/8"
J-Box
(3) 4" sq x 1-1/2"
Extension Box

-3L - 5" Dia. x 1/4" H. Machined Canopy - Integral Driver

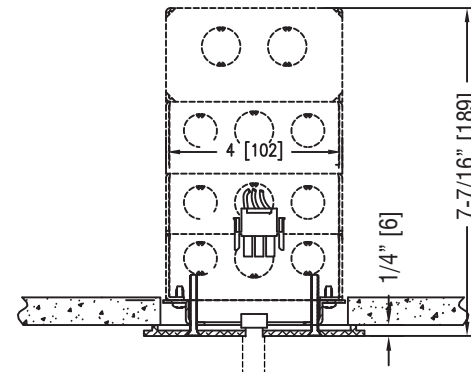

**-3L 0-10v, DALI
and DMX Driver**
(1) 4" sq x 2-1/8"
J-Box
(3) 4" sq x 1-1/2"
Extension Box

Note: In all instances, Junction Box is by others.


C3W-L19 Wallwash - 2700K

in feet / meters			in feet / meters	
6.0' / 1.8m	22.2 f.c. / 239.0 lux		4.8' / 1.5m	
8.0' / 2.4m	12.5 f.c. / 134.5 lux		6.4' / 2.0m	
10.0' / 3.0m	8.0 f.c. / 89.1 lux		8.0' / 2.5m	
12.0' / 3.7m	5.6 f.c. / 60.3 lux		10.0' / 3.0m	
14.0' / 4.3m	4.1 f.c. / 44.1 lux		11.3' / 3.5m	
16.0' / 4.9m	3.1 f.c. / 33.4 lux		12.9' / 4.0m	

CBCP:	See Candela Distribution		
Efficacy:	45.2 lm/w		
Delivered Lumens:	935 lm		
Plane:	0°	90°	180°
Spacing Criteria:	1	1	0.6

	0.0	45.0	90.0	135.0	180.0
0	800	800	800	800	800
5	816	814	791	759	744
15	735	754	718	608	542
25	559	624	578	384	292
35	280	266	184	108	76
45	217	261	223	48	8
55	128	140	87	1	0
65	74	68	16	0	0
75	39	29	3	0	0
85	18	10	0	0	0
90	10	5	0	0	0
95	6	3	0	0	0
105	2	1	0	0	0
115	0	0	0	0	0
125	0	0	0	0	0
135	0	0	0	0	0
145	0	0	0	0	0
155	0	0	0	0	0
165	0	0	0	0	0
175	0	0	0	0	0
180	0	0	0	0	0

74
189
229
197
126
66
31
14
2
1
0
0
0
0
0
0
0
0
0

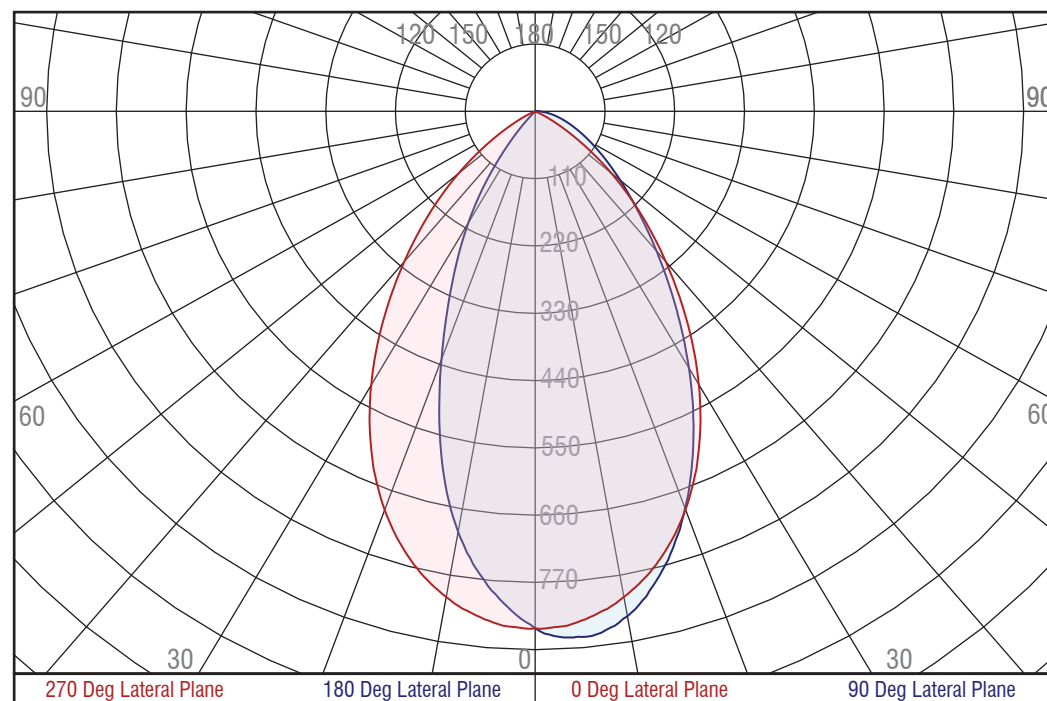


C3W-L19 Wallwash - 6500K

in feet / meters		in feet / meters	
6.0' / 1.8m	22.2 f.c. / 239.0 lux	4.8' / 1.5m	
8.0' / 2.4m	12.5 f.c. / 134.5 lux	6.4' / 2.0m	
10.0' / 3.0m	8.0 f.c. / 89.1 lux	8.0' / 2.5m	
12.0' / 3.7m	5.6 f.c. / 60.3 lux	10.0' / 3.0m	
14.0' / 4.3m	4.1 f.c. / 44.1 lux	11.3' / 3.5m	
16.0' / 4.9m	3.1 f.c. / 33.4 lux	12.9' / 4.0m	

CBCP:	See Candela Distribution		
Efficacy:	45.2 lm/w		
Delivered Lumens:	935 lm		
Plane:	0°	90°	180°
Spacing Criteria:	1	1	0.6

	0.0	45.0	90.0	135.0	180.0
0	800	800	800	800	800
5	816	814	791	759	744
15	735	754	718	608	542
25	559	624	578	384	292
35	280	266	184	108	76
45	217	261	223	48	8
55	128	140	87	1	0
65	74	68	16	0	0
75	39	29	3	0	0
85	18	10	0	0	0
90	10	5	0	0	0
95	6	3	0	0	0
105	2	1	0	0	0
115	0	0	0	0	0
125	0	0	0	0	0
135	0	0	0	0	0
145	0	0	0	0	0
155	0	0	0	0	0
165	0	0	0	0	0
175	0	0	0	0	0
180	0	0	0	0	0

74
189
229
197
126
66
31
14
2
1
0
0
0
0
0
0
0
0
0

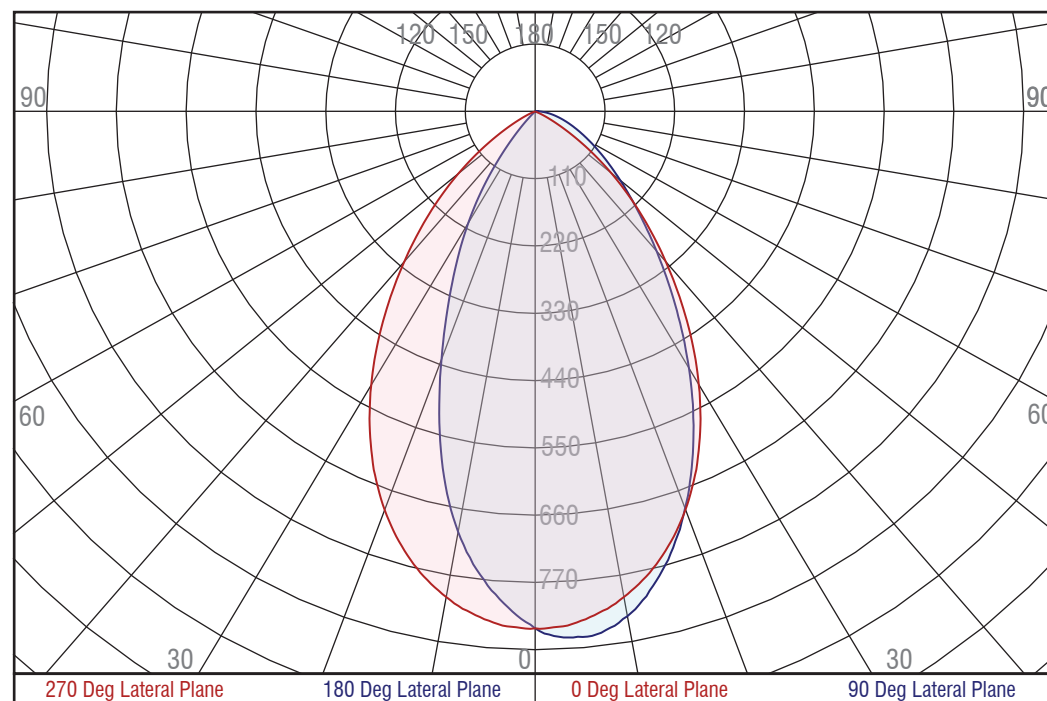

C3W

High Output
Tunable White
Wallwasher

Project Name

Type

Accessories



CUSTOM DISTRIBUTION FILMS AVAILABE ON REQUEST.

SIZE CODE G: 2.529" [64MM]

OL-DF-G (DIFFUSION FILM)

DIFFUSION FILM: 0.25MM (0.01") FILM SOFTENS BEAM EDGES (FOR USE WITH MULTIPLE MEDIA)



DISTRIBUTION DIAGRAM



OL-TD-G (POLYCARBONATE DIFFUSION LENS)

DIFFUSION FILM: 3MM (0.1") TEXTURED LENS SOFTENS BEAM EDGES (FOR STANDALONE USE)

DISTRIBUTION DIAGRAM



OL-30x60-G (UNIVERSAL SPREAD LENS - INCLUDED)

UNIVERSAL SPREAD LENS: 3MM (0.1") LENS SPREADS LIGHT UNIVERSALLY FOR WIDER DISTRIBUTION

DISTRIBUTION DIAGRAM

