

C50

PAR38
Object Fixture


Project Name

Type



Input Requirements

PAR38 Short Neck
LED Replacement Lamp
30 Watt Maximum

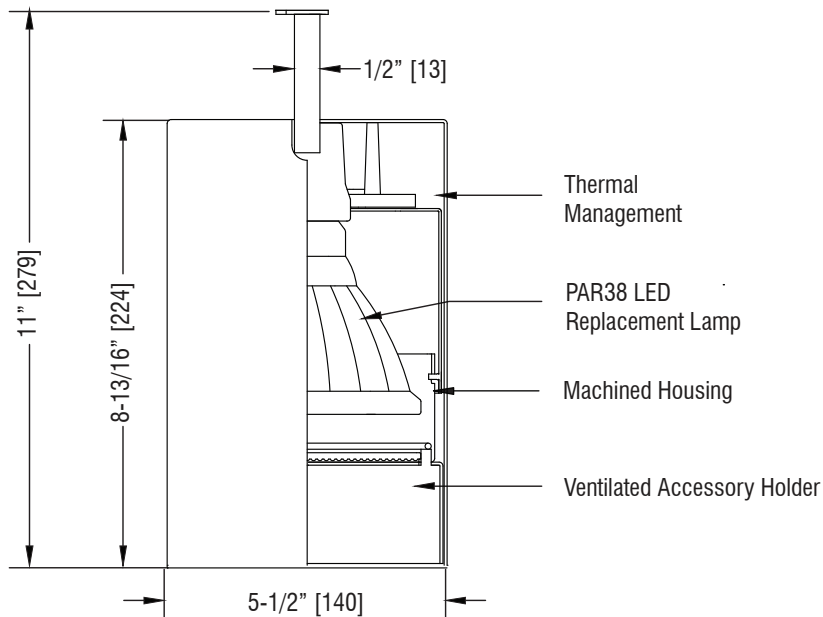

Enter Catalog Number Sequentially from Left to Right

C50 - - -

Model	Source	Adaptor	Dimming	Level	Options	Voltage	Finish
C50	PAR38	9AC BusRun Clipless 9AD BusRun Deep 9AS BusRun Shallow	E	ELV	0 10% R Rotation Lock SR Switch w/ Rotation Lock	A 120 D 240 F 240 (2 Circuit) C 277	P White MB Black BR Brushed CP Custom
		ST2 2-Circuit Stucchi ST3 3-Circuit Stucchi 3L 5" Canopy 7L 2" QC Canopy	E	ELV	0 10%		

ENTER RAL OR
OTHER FINISH
CODE

Flush Fit BusRun Adaptor

Litelab's flush fit BusRun adaptor recesses entirely inside BusRun to provide a clean aesthetic. It is available with a Switch and Rotation Lock.

Dimming Note

Dimming performance is contingent on the lamp and dimming system specified. The ensure dimming performance, please check with lamp and dimmer manufacturers. If a fixture is required for dimming tests, please contact your regional Sales Manager or local representative for samples.

Accessories: See Page 3

- ☐ OL-DF-p Beam Softening Film
- ☐ OL-TD-p Beam Softening Lens
- ☐ OL-10x40-p Linear Spread Lens
- ☐ OL-10x60-p Linear Spread Lens
- ☐ OL-30x60-p Universal Spread Lens
- ☐ LVH/e Hexell Louver




251 Elm Street, Buffalo, NY 14203 USA
800-238-4120 | www.litelab.com




Edition Date: 07/14/2021


9AC - BusRun Fitter - ELV Dimmable Only

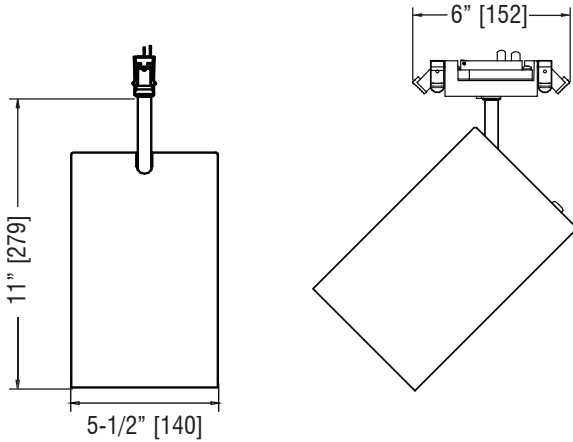


Stucchi - 2-Circuit Fitter

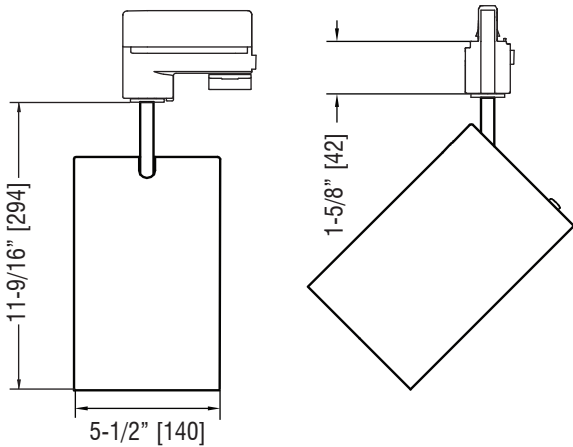

Stucchi - 3-Circuit Fitter

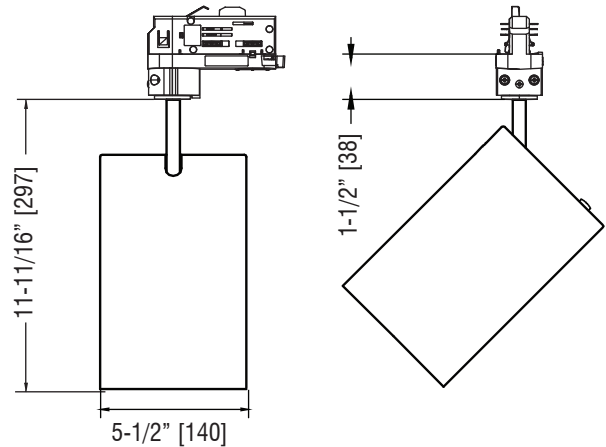


-7L - 2" Dia. Quick Connect Canopy

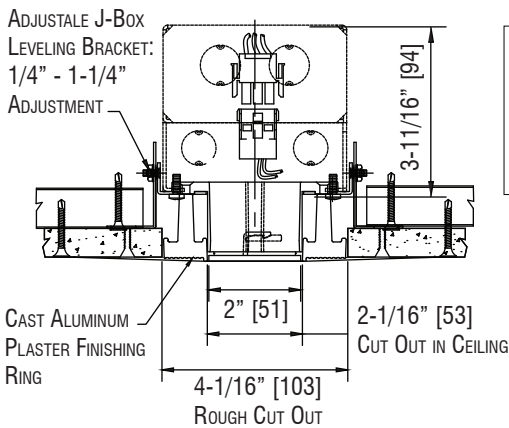

-7 Canopy
(1) 4" sq x 2-1/8"
J-Box
(1) 4" sq x 1-1/2"
Extension Box

* QC-7K-GYP-P/MB
Canopy Mount ordered
separately.

-3L - 5" Dia. x 1/4" H. Machined Canopy

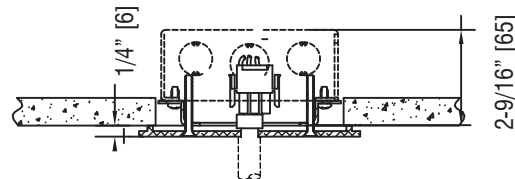

-3 Canopy
(1) 4" sq x 1-1/2"
Extension Box

J-Boxes Supplied by Others



251 Elm Street, Buffalo, NY 14203 USA
800-238-4120 | www.litelab.com

* Covered under one or more of the following patents: US: 8,740,421 B2, D499, 698, D389,012, Republic of China: D149,379, People's Republic of China: ZL 201130358013.3, European Union: RCD #001920356-0001. Additional patents pending. **See fittings and accessories page for mounting options and accessories.




Accessories

FIXTURE SIZE CODE (P): Ø3.79" [96mm]


CUSTOM DISTRIBUTION FILMS AVAILABLE ON REQUEST.

OL-DF-P (DIFFUSION FILM)

DIFFUSION FILM: 0.25MM (0.01") FILM SOFTENS BEAM EDGES (FOR USE WITH MULTIPLE MEDIA)




DISTRIBUTION DIAGRAM




OL-TD-P (POLYCARBONATE DIFFUSION LENS)

DIFFUSION FILM: 3MM (0.1") TEXTURED LENS SOFTENS BEAM EDGES (FOR STANDALONE USE)




DISTRIBUTION DIAGRAM




OL-10x40-P (LINEAR SPREAD LENS)

40° LINEAR SPREAD LENS: 3MM (0.1") ELLIPTICAL SPREAD FOR LONG / LINEAR OBJECTS




DISTRIBUTION DIAGRAM




OL-10x60-P (LINEAR SPREAD LENS)

60° LINEAR SPREAD LENS: 3MM (0.1") ELLIPTICAL SPREAD FOR LONG / LINEAR OBJECTS




DISTRIBUTION DIAGRAM

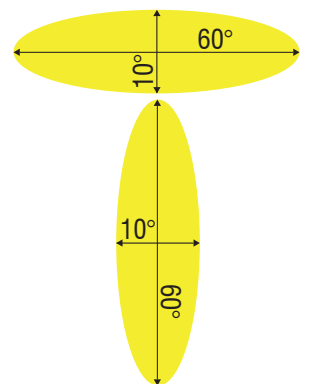


OL-30x60-P (UNIVERSAL SPREAD LENS - INCLUDED)

UNIVERSAL SPREAD LENS: 3MM (0.1") LENS SPREADS LIGHT UNIVERSALLY FOR WIDER DISTRIBUTION



DISTRIBUTION DIAGRAM



LVH/P (HEXCELL LOUVER)

HEXCELL LOUVER: 3MM (0.1") MATTE BACK FINISH, 45° GLARE CUTOFF FOR VISUAL COMFORT

