


LC-H

Static White
Linear LED


Project Name

Type

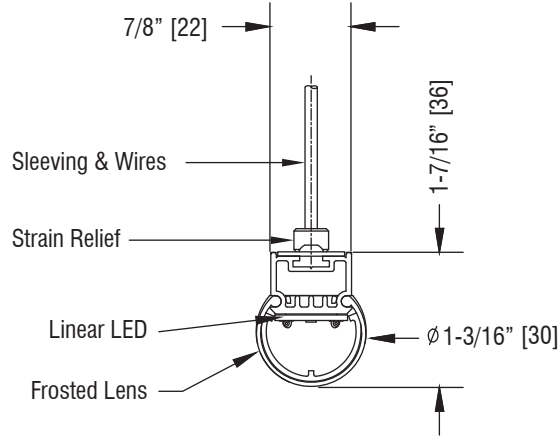

Input Requirements

lm/ft.	VAC	4'	5'	6'
1000	120	.5A/58W	.7A/73W	.8A/87W
	240	.3A/58W	.4A/74W	.5A/88W
	277	.3A/58W	.4A/74W	.4A/88W
700	120	.4A/37W	.5A/48W	.5A/58W
	240	.2A/38W	.3A/48W	.3A/59W
	277	.2A/38W	.3A/49W	.3A/59W

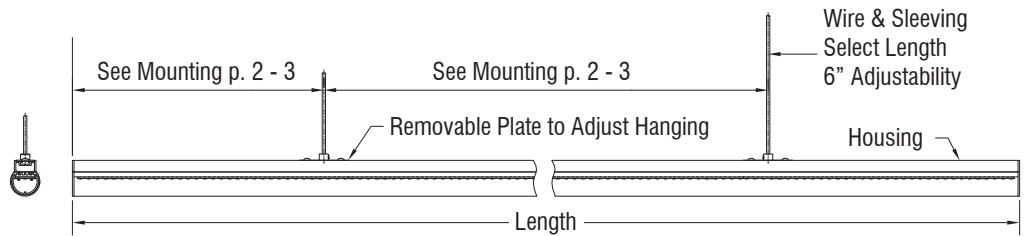

Enter Catalog Number Sequentially from Left to Right

Model	Mounting	Lumens	CRI	CCT	Adaptor	Dimming	Level	Voltage	Finish	Cord Length
LC4 4'	H Hanging	L10 1000	9 95	27 2700	9TC BusRun Clipless w/ Driverbox	E ELV	1 1%	A 120	P White	ENTER CORD LENGTH IN FEET
LC5 5'		L07 700		30 3000	9TD BusRun Deep w/ Driverbox			D 240	MB Black	
LC6 6'				35 3500	9TS BusRun Shallow w/ Driverbox			F* 240 (2-Circuit)	BR Brushed	
					9HC BusRun Clipless w/ Driverbox	E ELV	0 10%	C 277	CP Custom	ENTER RAL OR OTHER FINISH CODE
					9HD BusRun Deep w/ Driverbox	W Wireless	C Casambi			
					9HS BusRun Shallow w/ Driverbox	A Avi-On	Z Zigbee			
					BT Basic Track	T Athena RF				
					ST2 2-Circuit Stucchi	E ELV	0 10%			
					ST3 3-Circuit Stucchi	Z 0-10	D Dark			
					3L 5" Canopy	M DMX				
					5L 3.5" QC Canopy	D DALI				
					7L 2" QC Canopy (Remote Driver Only)					

NOMINAL	LENGTH	MOUNTING	PLUG-IN
4'	44-3/8"	1'-10"	N/A
5'	66-3/8"	3'-8"	2'1"
6'	77-3/8"	4'-7"	3'0"

Dimming Note
This fixture is provided with LED Drivers suitable for the dimming protocol specified. Dimming performance may vary based on dimmer model or system being used. If exact dimming performance is required, Litelab recommends testing the Litelab fixture with the specified dimmer.

Flush Fit BusRun Adaptor
Litelab's flush fit BusRun adaptor recesses entirely inside BusRun to provide a clean aesthetic. BusRun fitters are dimmable to 1% using an ELV dimming system.




251 Elm Street, Buffalo, NY 14203 USA
800-238-4120 | www.litelab.com





Mounting

BusRun

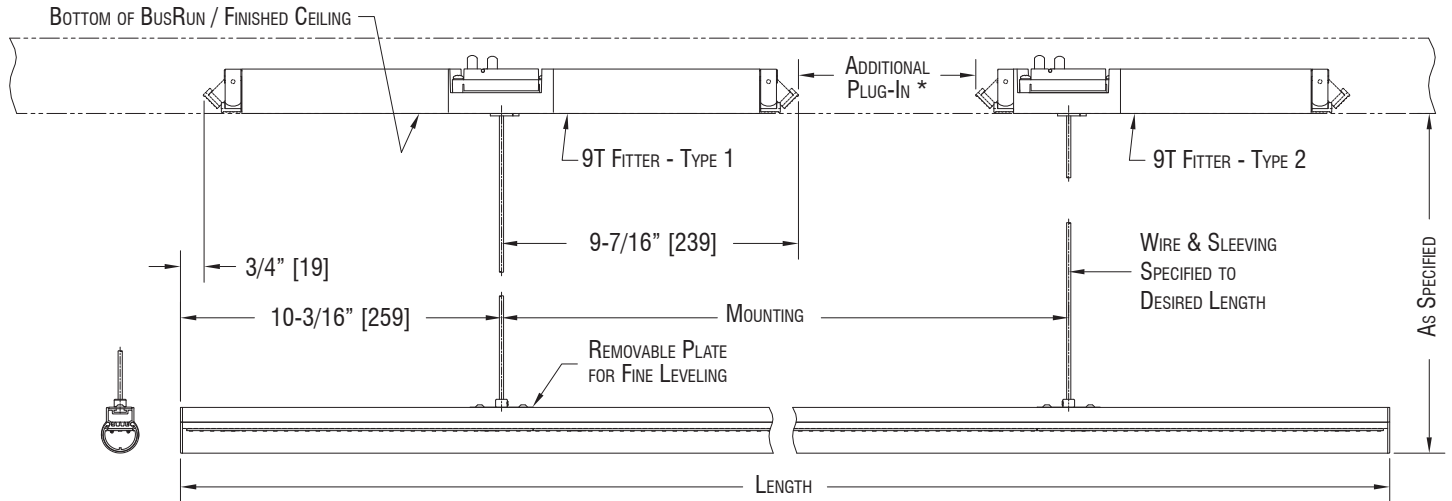

EXACT FIXTURE LENGTHS				
NOMINAL	ACTUAL	MOUNTING	FITTER TYPE	ADDITIONAL PLUG-IN*
4'	44-3/8"	2'0"	#2 - #2	N / A
5'	66-5/8"	3'10"	#1 - #2	2'3"
6'	77-5/8"	4'9"	#1 - #2	3'2"


Stucchi 3-Circuit Track / Databus

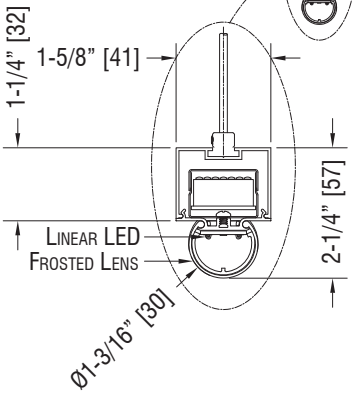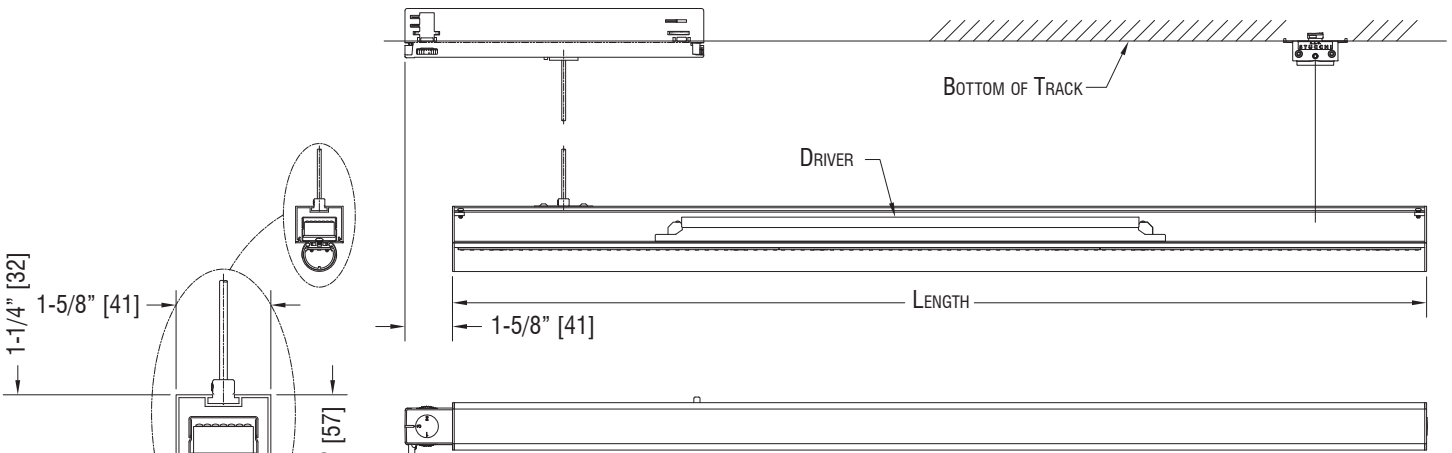


EXACT FIXTURE LENGTHS				
NOMINAL	ACTUAL	MOUNTING	FITTER TYPE	ADDITIONAL PLUG-IN*
4'	44-3/8"	3'6"	#2 - #2	1'10"
5'	66-5/8"	5'0"	#1 - #2	3'4"
6'	77-5/8"	6'0"	#1 - #2	4'4"

Mounting

Stucchi 2-Circuit Track / Databus

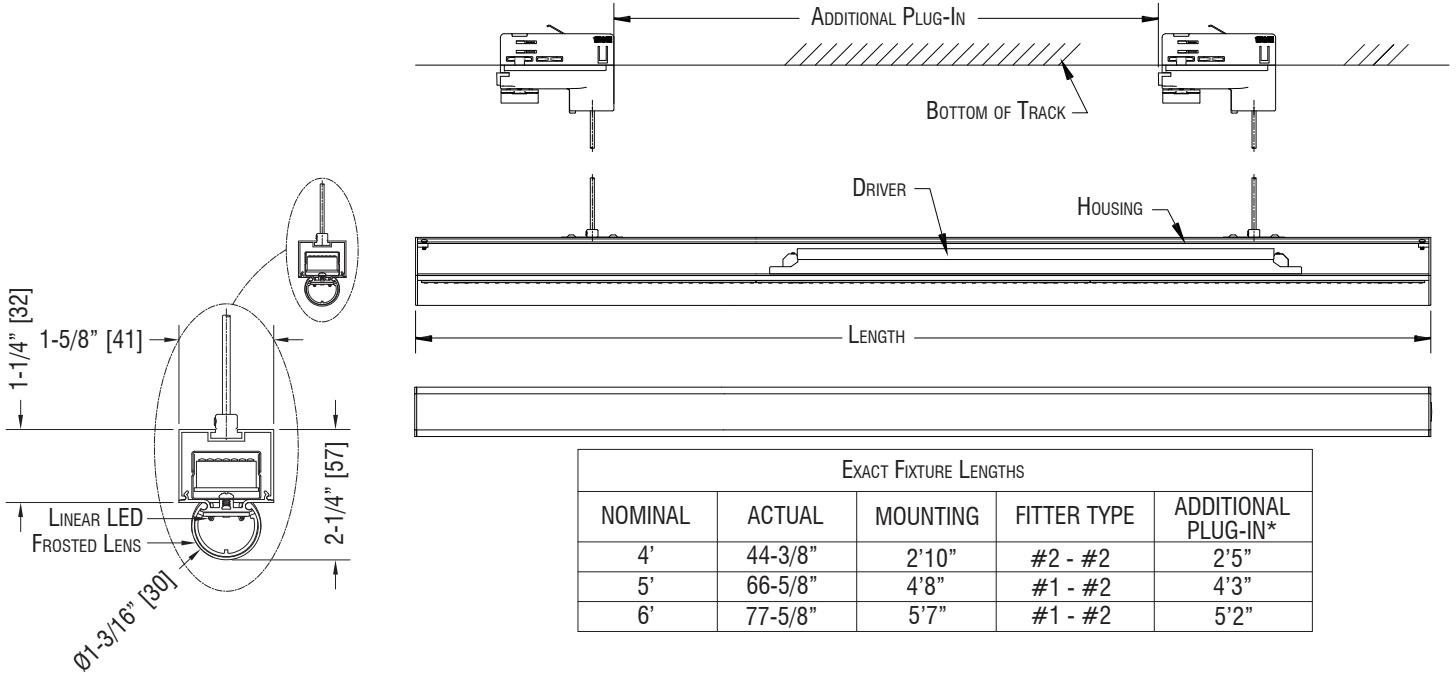

-5L 3-1/2" Quick Connect Canopy (Gypsum Installation Shown) QC-5K-P/MB Canopy Mounted Ordered Separately

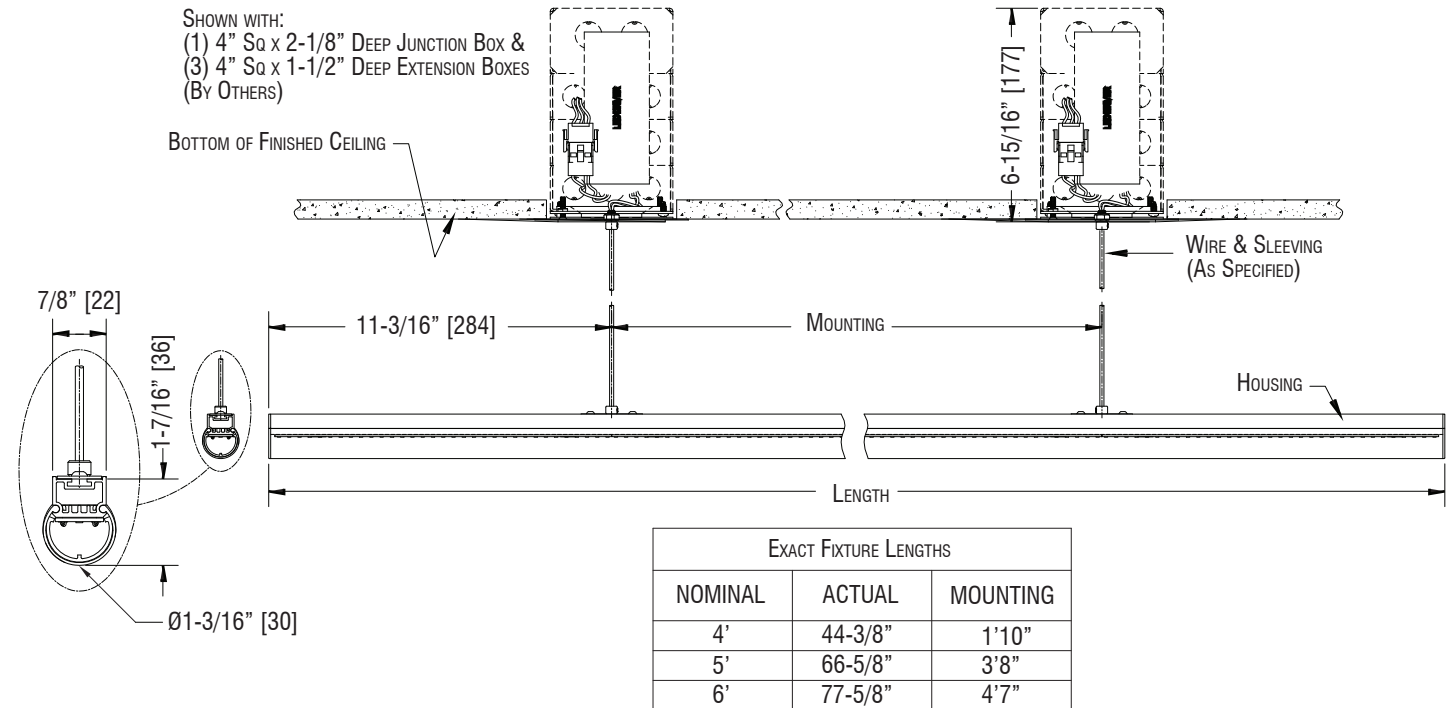

J-Boxes Supplied by Others



251 Elm Street, Buffalo, NY 14203 USA
800-238-4120 | www.litelab.com


* Covered under one or more of the following patents: US: 8,740,421 B2, D499, 698, D389,012, Republic of China: D149,379, People's Republic of China: ZL 201130358013.3, European Union: RCD #001920356-0001. Additional patents pending. **See fittings and accessories page for mounting options and accessories.



Mounting


-7L 2" Quick Connect Canopy (Wood Installation Shown)**

** QC-7K-WD-MB Canopy
Mount ordered separately.

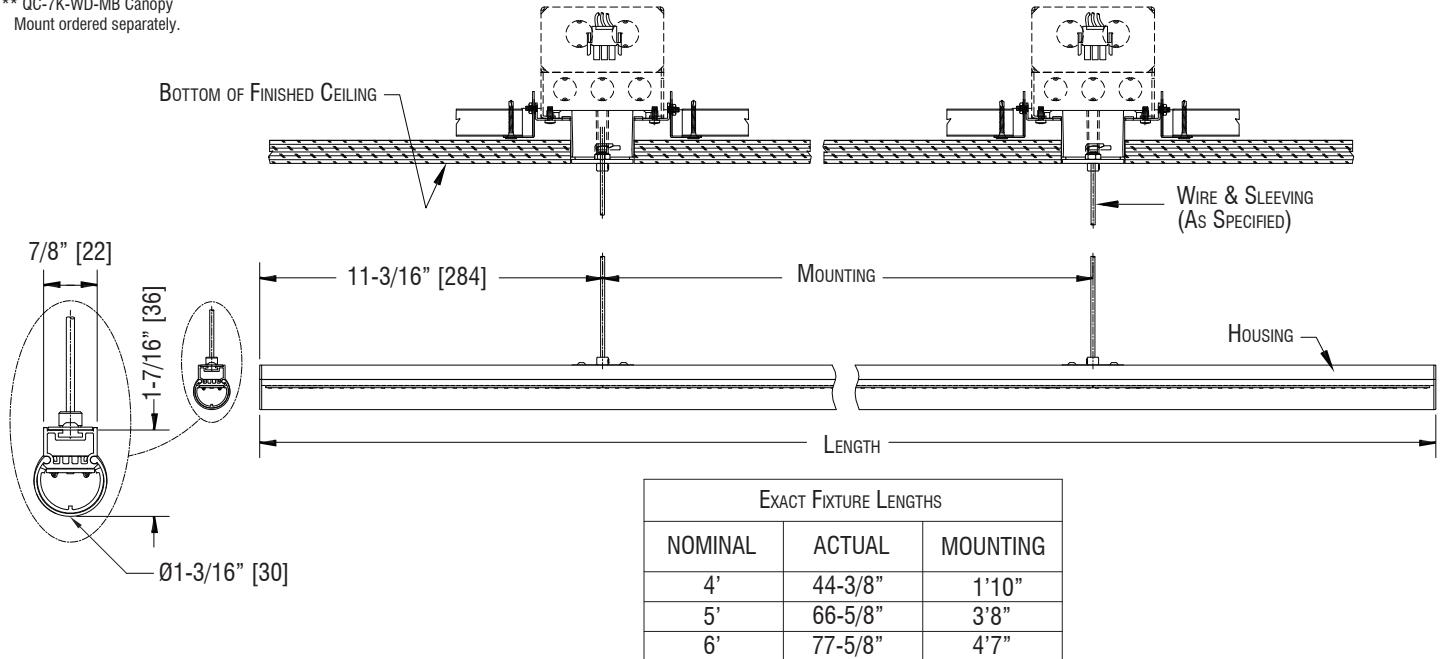

-7L 2" Quick Connect Canopy (Gyp Installation Shown)*

* QC-7K-GYP-P/MB
Canopy Mount ordered
separately.

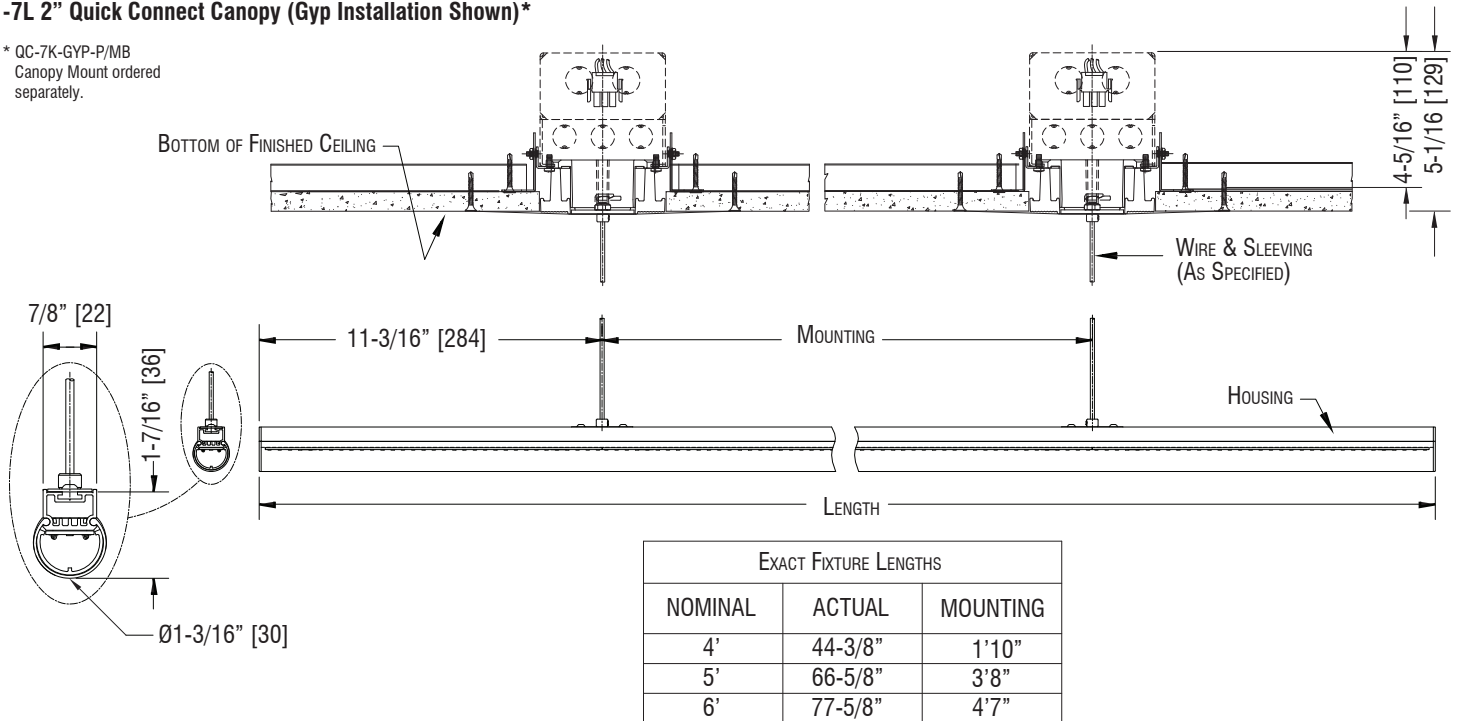

J-Boxes Supplied by Others



251 Elm Street, Buffalo, NY 14203 USA
800-238-4120 | www.litelab.com

* Covered under one or more of the following patents: US: 8,740,421 B2, D499, 698, D389,012, Republic of China: D149,379, People's Republic of China: ZL 201130358013.3, European Union: RCD #001920356-0001. Additional patents pending. **See fittings and accessories page for mounting options and accessories.



LC-H

Static White
Linear LED

Project Name


Type

Photometrics

LC3-H

Beam Angle: 107.5°

Mounting Height in feet / meters	FC / Lux	Beam Diameter in feet / meters
6.0' / 1.8m	14.5 f.c. / 156.1 lux	7.3' / 2.2m
8.0' / 2.4m	8.1 f.c. / 87.2 lux	9.8' / 3.0m
10.0' / 3.0m	5.2 f.c. / 56.0 lux	12.2' / 3.7m
12.0' / 3.7m	3.6 f.c. / 67.8 lux	14.7' / 4.5m
14.0' / 4.3m	2.7 f.c. / 29.1 lux	17.1' / 5.2m
16.0' / 4.9m	2.0 f.c. / 21.5 lux	19.6' / 6.0m

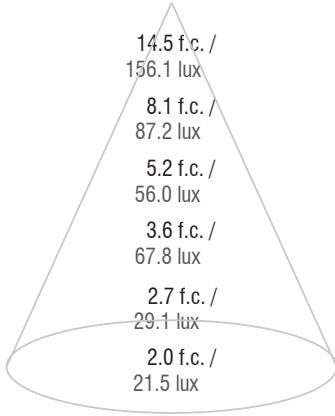

CBCP:	21,507 Cd
Efficacy:	58.8 lm/w
Delivered Lumens:	1844.4 lm

LC3-H - Polar Plot of Candela

