
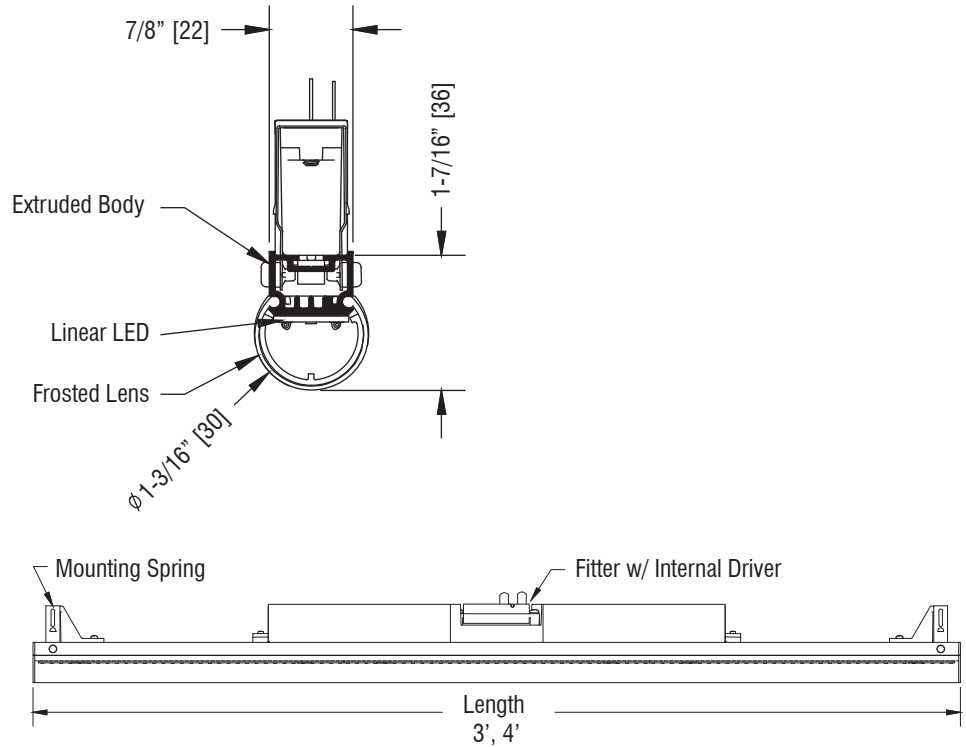


LC-S

Static White
Linear LED

Project Name

Type

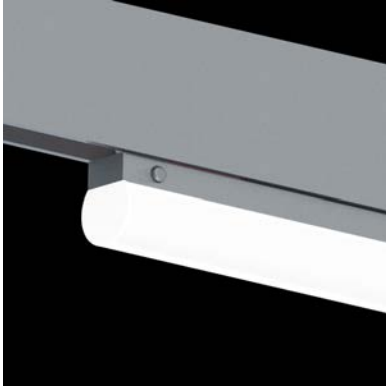

Input Requirements

1000 Lumens / lft.	120VAC/0.1A/15W 240VAC/0.1A/16W 277VAC/0.1A/16W
600 Lumens / lft.	120VAC/0.1A/10W 240VAC/0.1A/10W 277VAC/0.1A/10W

Enter Catalog Number Sequentially from Left to Right

 - - - -

Model	Mounting	Lumens	CRI	CCT	Adaptor	Dimming	Level	Voltage	Finish
LC3 3'	S Surface	L10 1000	9 95	27 2700	9TC BusRun Clipless	E ELV	1 1%	A 120	P White
LC4 4'		L06 650		30 3000	9TD BusRun Deep			D 240	MB Black
				35 3500	9TS BusRun Shallow			F* 240	BR Brushed
								(2-Circuit)	CP Custom
					9HC BusRun Clipless w/ Driverbox	E ELV W Wire-less	0 10% C Casambi	C 277	
					9HD BusRun Deep w/ Driverbox		A Avi-On		
					9HS BusRun Shallow w/ Driverbox		Z Zigbee		
							T Lutron Athena		
					ST2 2-Circuit Stucchi	E ELV	0 10%		
					ST3 3-Circuit Stucchi	Z 0-10	D Dark		
					CLG Ceiling	M DMX D DALI			

Dimming Note

This fixture is provided with LED Drivers suitable for the dimming protocol specified. Dimming performance may vary based on dimmer model or system being used. If exact dimming performance is required, Litelab recommends testing the Litelab fixture with the specified dimmer.

Flush Fit BusRun Adaptor

Litelab's flush fit BusRun adaptor recesses entirely inside BusRun to provide a clean aesthetic. It is available with a Switch and Rotation Lock or On-Board Potentiometer for individual fixture dimming. BusRun fitters are available dimmable to 1% and can be dimmed proportionally using an ELV dimming system.




251 Elm Street, Buffalo, NY 14203 USA
800-238-4120 | www.litelab.com




Edition Date: 07/14/2021

Mounting


9TC - 120/240/277v Recessed BusRun Fitter - ELV Dimmable Only - 1%

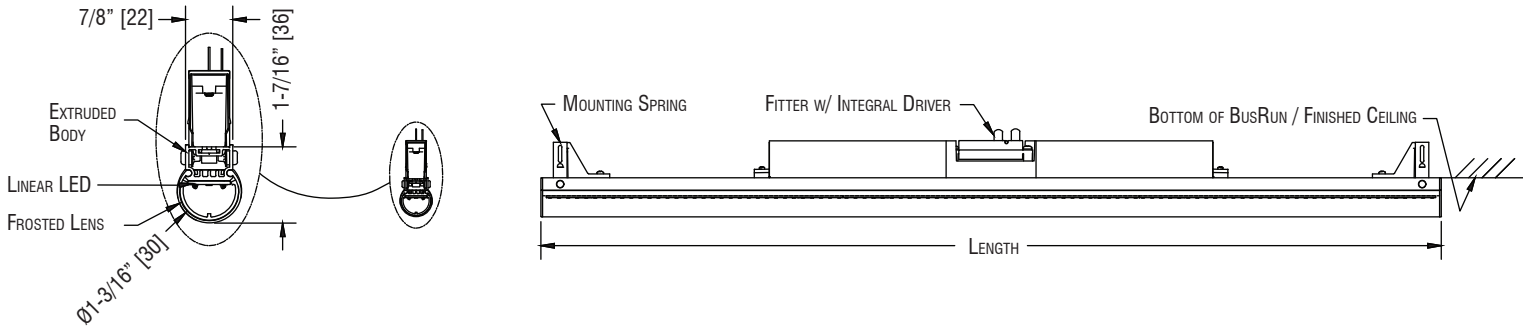

ST3 - 120/240/277v Stucchi Fitter - ELV, Dali, DMX and 0-10v Dimming Available

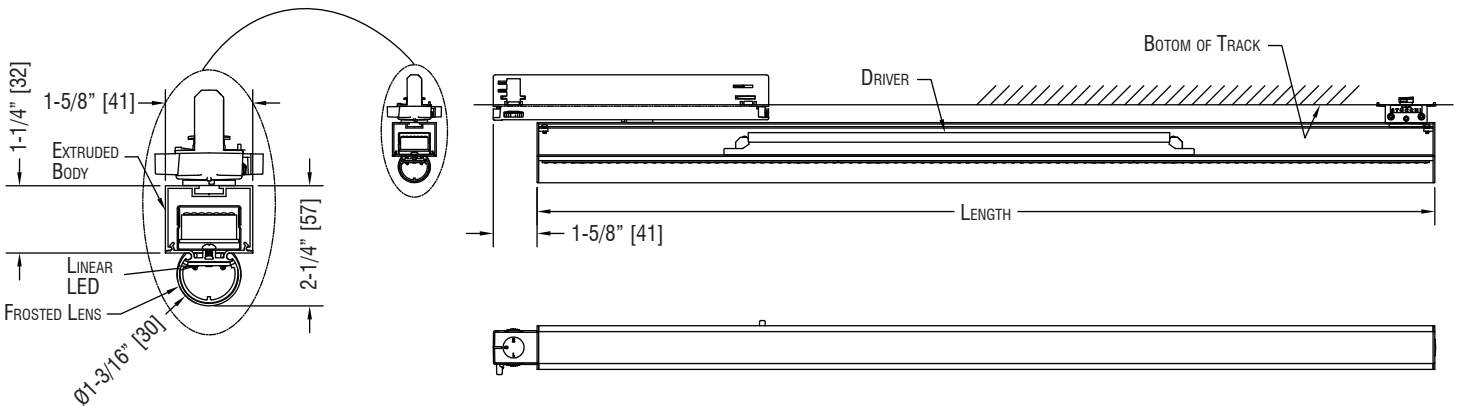

Ceiling-Mounted - ELV, Dali, DMX and 0-10v Dimming Available

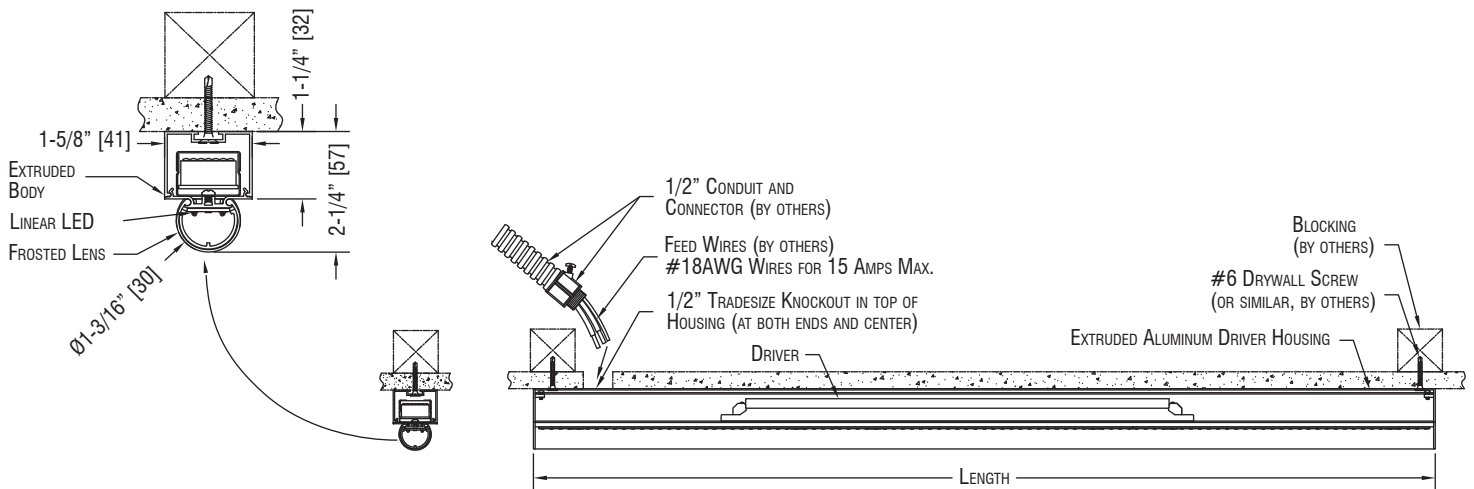

LC-S

Static White
Linear LED

Project Name


Type

Photometrics

LC3-S

Beam Angle: 107.5°

Mounting Height in feet / meters	FC / Lux	Beam Diameter in feet / meters
6.0' / 1.8m	14.5 f.c. / 156.1 lux	7.3' / 2.2m
8.0' / 2.4m	8.1 f.c. / 87.2 lux	9.8' / 3.0m
10.0' / 3.0m	5.2 f.c. / 56.0 lux	12.2' / 3.7m
12.0' / 3.7m	3.6 f.c. / 67.8 lux	14.7' / 4.5m
14.0' / 4.3m	2.7 f.c. / 29.1 lux	17.1' / 5.2m
16.0' / 4.9m	2.0 f.c. / 21.5 lux	19.6' / 6.0m

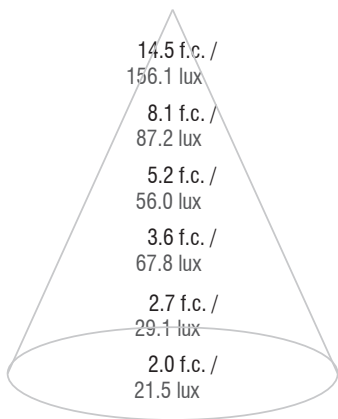

CBCP:	21,507 Cd
Efficacy:	58.8 lm/w
Delivered Lumens:	1844.4 lm

LC3-S - Polar Plot of Candela

