

INTRODUCTION TO LITELAB CATALOG CODES

INTRODUCTION

LIKE ANY MANUFACTURER WITH A LONG HISTORY AND A DYNAMIC PRODUCT OFFERING, LITELAB HAS USED A VARIETY OF MODEL NUMBERING AND CATALOG CODE SYSTEMS. EACH SYSTEM WAS UNIQUELY ADAPTED TO THE PRODUCT TYPE AND MARKETING METHODOLOGY OF THE TIME. HOWEVER, OVER TIME THE ORIGINAL SIGNIFICANCE OF OLDER SYSTEMS HAS BECOME CONVOLUTED, OR MALADAPTED TO MORE CURRENT PRODUCT DEVELOPMENT. THE CONSEQUENCE HAS BEEN ILL-FITTING OR INCONSISTENT MODEL AND CATALOG CODE SYSTEMS.

IN RESPONSE TO CHANGES IN OUR PRODUCT OFFERINGS AND FEEDBACK FROM SPECIFIERS, LITELAB HAS REVISED OUR MODEL NUMBERING AND CATALOG CODES TO BE MORE DESCRIPTIVE AND CONSISTENT WITH EMERGING INDUSTRY TRENDS.

THIS SHORT PAMPHLET IS DESIGNED TO HELP YOU NAVIGATE LITELAB'S NEW MODEL NUMBERING AND CATALOG CODE SYSTEMS, TO DRAW EQUIVALENCES WITH THE OLDER SYSTEMS, AND TO EXPLAIN THE LOGIC BEHIND THE NEW ONES. IT CAN BE USED TO MAP OLDER MODEL NUMBERS AND CATALOG CODES TO NEW ONES, GENERATE NEW CATALOG CODES FOR SPECIFYING AND ORDERING LITELAB PRODUCT, OR DECIPHER NEW CODES AS NEEDED.

IF YOU HAVE ANY QUESTIONS REGARDING THIS PAMPHLET OR ITS SUBJECT MATTER, PLEASE CONTACT YOUR REGIONAL SALES MANAGER. A LIST OF REGIONAL SALES MANAGERS AND THEIR TERRITORIES IS INCLUDED ON THIS PAGE, AND APPEARS ON OUR WEBSITE: WWW.LITELAB.COM.

FOR YOUR CONVENIENCE, ALL WEBSITE ADDRESSES AND STANDARD PRODUCT CODES HAVE BEEN HYPERLINKED TO OUR WEBSITE, FROM WHICH SUBMITTALS, PHOTOMETRIC FILES AND OTHER RESOURCES CAN BE DOWNLOADED. IF YOU CANNOT FIND WHAT YOU ARE LOOKING FOR, PLEASE CONTACT US OR YOUR LOCAL REPRESENTATIVE.

TABLE OF CONTENTS

ANATOMY OF LITELAB CATALOG CODES
 UNDERSTANDING THE NEW MODEL NUMBERS
 UNDERSTANDING THE NEW FITTER CODES
 ADVANTAGE LINE / A3 CROSSOVER CODES
 CYLINDER SERIES / C2, C3 & C5 CROSSOVER CODES
 MUSEUM LINE / C5 AND M8 CROSSOVER CODES
 ALS / Y3, M3 & S3 CROSSOVER CODES

MODEL NUMBER CONVERTER:

<input type="text"/>	<input type="text"/>
NEW MODEL NUMBER	OLD MODEL NUMBER
<input type="text"/>	<input type="text"/>
OLD MODEL NUMBER	NEW MODEL NUMBER

LITELAB CONTACTS

RICK SPAULDING

P. 716.270.4524 | E. SPAULDINGR@LITELAB.COM

INTERNATIONAL SALES, WASHINGTON D.C., ATLANTA, GA & MIAMI, FL

ZACHARY SPAULDING

P. 716.270.4516 | E. SPAULDINGZ@LITELAB.COM

NEW YORK, CONNECTICUT, MASSACHUSETTS

SARAH KRAFT


P. 716.270.4513 | E. KRAFTS@LITELAB.COM

PACIFIC AND MOUNTAIN STATES, TEXAS

MARY WELGS

P. 716.536.7272 | E. WELGSM@LITELAB.COM

NEW YORK, MID-ATLANTIC, SOUTH-EAST & CENTRAL STATES



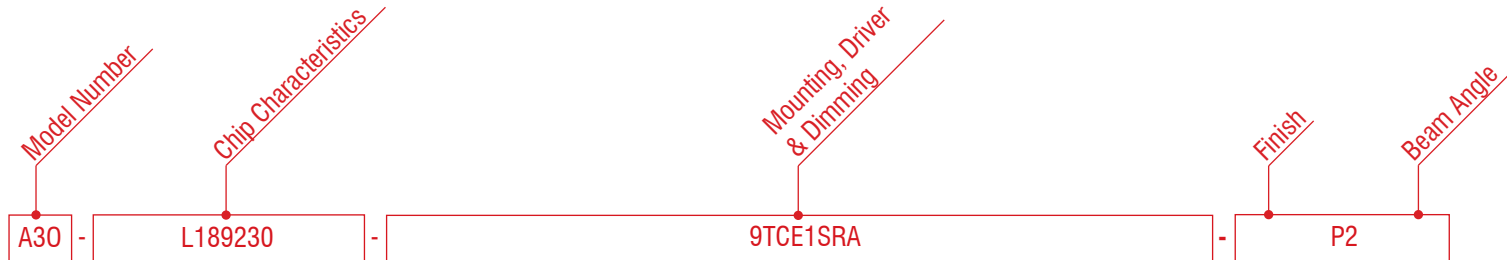


Model	Lumens/CRI		CCT		Adaptor		Dimming		Level		Options		Voltage		Finish		Optics		
A30	L18	1800/92	27	2700	9TC	BusRun Clipless	E	ELV	1	1%	P	Potentiometer	A	120	P	White	1	10°	
	L15	1550/98	30	3000	9TD	BusRun Deep			0	10%	R*	Rotation Lock	D	240	MB	Black	2	20°	
	L13	1300/92	35	3500	9TS	BusRun Shallow					S	Switch	F*	240	BR	Brushed	3	30°	
	L11	1100/98	40	4000							SP	Switch w/ Potentiometer	(2-Circuit) C	277	CP	Custom			
					9HC	BusRun Clipless w/ Driverbox	E	ELV	0	10%		SR*	Switch w/ Rotation Lock						
					9HD	BusRun Deep w/ Driverbox	W	Wire- less	C	Casambi									
					9HS	BusRun Shallow w/ Driverbox			A	Avi-On									
									Z	Zigbee									
									V	Lutron									
						BT	Basic Track												
												* Rotation Lock and type "F" voltage are exclusive to 9T Fitters.				ENTER RAL OR OTHER FINISH CODE			
												Rotation Lock not available with							

Note: All attributes in this example are specific to the A30 Static White fixture, and may change based on luminaire.

* Rotation Lock and type "F" voltage are exclusive to 9T Fitters.
Rotation Lock not available with Potentiometer.


ENTER RAL OR OTHER FINISH CODE

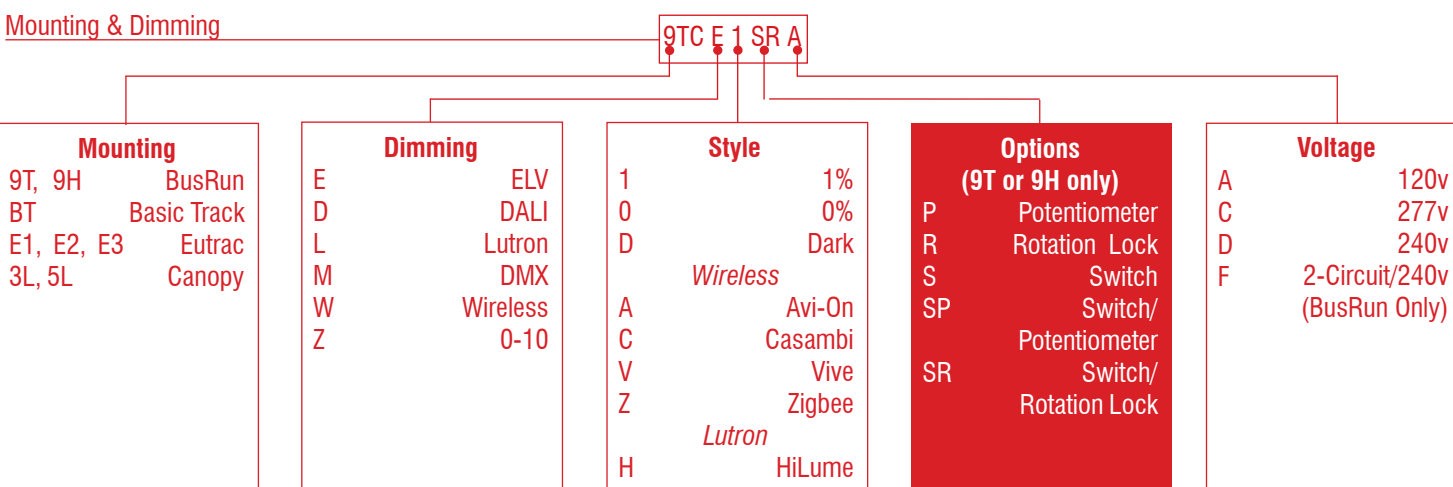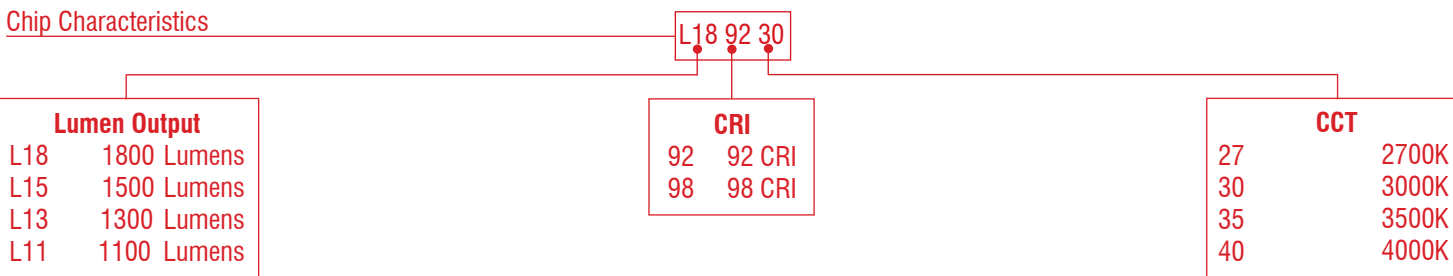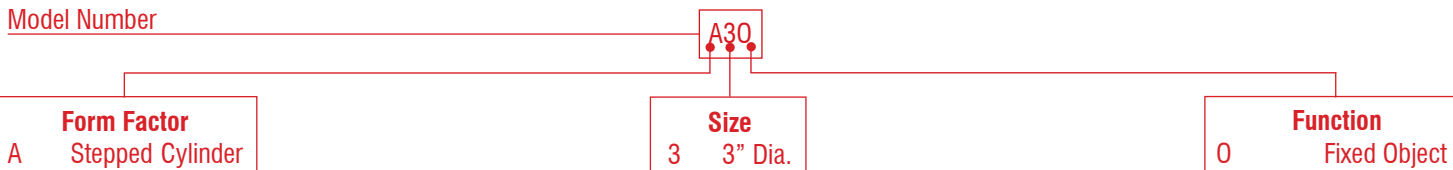

MODEL NUMBERS

LITELAB'S NEW MODEL NUMBERING SYSTEM CONSISTS OF A BASE SET OF THREE CHARACTERS EACH REPRESENTING FORM, SIZE AND FUNCTION RESPECTIVELY. THIS IS FOLLOWED BY A SOURCE CHARACTERISTIC CLUSTER. TOGETHER, THESE CODES WILL DESIGNATE THE FIXTURE TYPE AND PERFORMANCE PROFILE OF THE LUMINAIRE.

WE HAVE KEPT CERTAIN ASPECTS OF THE MODEL NUMBERS AND CHARACTERISTIC CLUSTER CONSISTENT WITH PREVIOUS SYSTEMS FOR THE SAKE OF FAMILIARITY.

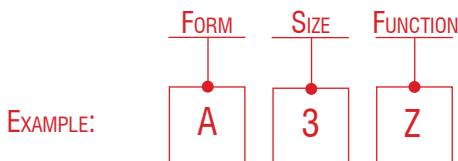

FORM

SURFACE MOUNTED LUMINAIRES

A	STEPPED CYLINDER
C	CYLINDER
R	RECTANGULAR

RECESSED ADJUSTABLE LUMINAIRES

Y	YOKE-MOUNTED (H02)
M	MAGNET-MOUNTED (H06)
S	STEM-MOUNTED (H09/H10)

SIZE

2	2-3/8" MAX.
3	3-1/8" MAX.
4	4-1/2" MAX.
5	5-1/2" MAX.
8	8" MAX.


FUNCTION

O	FIXED OBJECT
P	FRAMING PROJECTOR
S	PIN SPOT
W	WALLWASHER
Z	ZOOM

SOURCE CHARACTERISTICS

THE SECOND CLUSTER THAT APPEARS IN LITELAB'S NEW CATALOG CODE IS THE SOURCE CHARACTERISTIC CLUSTER. THIS IS A MAXIMUM SEVEN-CHARACTER CODE THAT PROVIDES INFORMATION REGARDING THE LUMINAIRE'S SOURCE.

PLEASE NOTE THAT THERE MAY BE MULTIPLE SOURCE CHARACTERISTIC CODES ASSOCIATED WITH A MODEL NUMBER. AS A RESULT, THE SOURCE CHARACTERISTIC CODE IS INSTRUMENTAL IN DIFFERENTIATING PERFORMANCE PROFILES WITHIN A LUMINAIRE LINE.

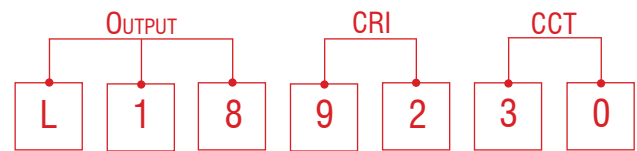

LED EXAMPLE

OUTPUT

*REFLECTS OFFERINGS AVAILABLE AS OF 2021.08.30

L45	4500 LUMENS
L42	4200 LUMENS
L39	3900 LUMENS
L30	3000 LUMENS
L20	2000 LUMENS
L18	1800 LUMENS
L16	1600 LUMENS
L14	1400 LUMENS
L13	1300 LUMENS
L11	1100 LUMENS
L10	1000 LUMENS
L06	600 LUMENS

CRI

90	90 CRI
92	92 CRI
95	95 CRI
98	98 CRI


CCT

27	90 CRI
30	92 CRI
35	95 CRI
40	98 CRI
DL	1800-2700 CCT (DIM-TO-WARM)
DH	1800-3000 CCT (DIM-TO-WARM)
TL	1800-4000 CCT (TUNABLE WHITE)
TH	2700-6500 CCT (TUNABLE WHITE)

FITTER CODES

SINCE THE INTRODUCTION OF LED, THERE HAS BEEN AN INTENSIFICATION OF INTEREST IN ADVANCED CONTROLS. THIS IS IN PART BECAUSE LEDs ARE EASIER TO CONTROL THAN MANY OF THEIR PREDECESSORS, AND IN PART BECAUSE OF NEW DESIGN PARADIGMS THAT EMPHASIZE THE USE OF NETWORKED DIGITAL TECHNOLOGIES TO INCREASE BUILDING EFFICIENCY. IN ADDITION TO ADVANCES IN SENSOR NETWORKS AND ACTUATED LUMINAIRES THAT IS DRIVING THE “SMART BUILDING” REVOLUTION, TUNABLE WHITE AND RGBW COLOR-SHIFTING LEDs ARE ALSO BEING SPECIFIED WITH INCREASED FREQUENCY.

LITELAB HAS UPDATED ALL OF OUR FITTER CODES TO ACCOMMODATE THE PROLIFERATION OF ADVANCED CONTROLS IN OUR INDUSTRY. THE NEW FITTER CODES INCLUDE MOST OF THE POPULAR CONTROLS CURRENTLY BEING SPECIFIED AND HAVE BEEN FUTURE PROOFED TO ABSORB EMERGING CONTROLS AS THEY APPEAR ON THE MARKET. THE FITTER CODE IS AN EIGHT CHARACTER CLUSTER THAT INCLUDES THE MOUNTING CONDITION, DIMMING PROTOCOL, DIMMING STYLE, OPTIONS (BASED ON PROTOCOL) AND VOLTAGE. IN ALL INSTANCES, WITH THE EXCEPTION OF ELV, LITELAB USES 0.1% DIMMING DRIVERS.

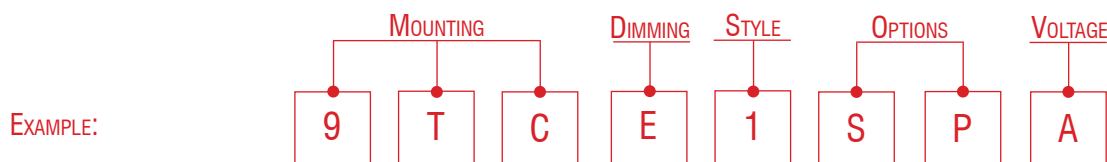**MOUNTING***BusRun**

9TC	FULLY RECESSED POWER SUPPLY / CLIPLESS
9TD	FULLY RECESSED POWER SUPPLY / DEEP CLIPS
9TS	FULLY RECESSED POWER SUPPLY / SHALLOW CLIPS

9HC	EXPOSED DRIVER BOX / CLIPLESS
9HD	EXPOSED DRIVER BOX / DEEP CLIPS
9HS	EXPOSED DRIVER BOX / SHALLOW CLIPS

BASIC TRACK

BT	BASIC TRACK FITTER WITH EXPOSED DRIVER BOX
----	--

*EUTRAC***

E1	1-CIRCUIT EUTRAC FITTER WITH EXPOSED DRIVER BOX
E2	2-CIRCUIT EUTRAC FITTER WITH EXPOSED DRIVER BOX
E3	1-CIRCUIT EUTRAC FITTER WITH EXPOSED DRIVER BOX

CANOPIES

3L	5" CANOPY
5L	3.5" QUICK CONNECT CANOPY WITH INTEGRAL POWER SUPPLY
7L	2" QUICK CONNECT CANOPY WITH REMOTE POWER SUPPLY

DIMMING

E	ELV (ELECTRONIC LOW VOLTAGE / REVERSE PHASE
D	DALI
L	LUTRON
M	DMX
W	WIRELESS
Z	0-10V

STYLE

0	10% DIMMABLE / ELV W/ DRIVER BOX ONLY
1	1% DIMMABLE / 9T ELV ONLY
J	JA-8 APPROVED / ELV OR 0-10V ONLY
D	DIM-TO-DARK (0.1%) / 0-10V, DALI & DMX ONLY
C	CASAMBI / WIRELESS ONLY
A	AVI-ON / WIRELESS ONLY
Z	ZIGBEE / WIRELESS ONLY
V	LUTRON VIVE / WIRELESS ONLY
H	HIGH-LUME / LUTRON ONLY

OPTIONS

P	POTENTIOMETER / 9T OR 9H ONLY
R	ROTATION LOCK / 9T ONLY
S	SWITCH / 9T OR 9H ONLY
SP	SWITCH & POTENTIOMETER / 9T OR 9H ONLY
SR	SWITCH & ROTATION LOCK / 9T ONLY

VOLTAGES

A	120V
C	277V
D	240V
F	2-CIRCUIT 240V / 9T OR 9H ONLY

ADDITIONAL NOTES:

* 9T RECESSED POWER SUPPLY AVAILABLE FOR ELV DIMMING ONLY
9H AVAILABLE FOR ELV OR WIRELESS DIMMING ONLY

**E1 IS AVAILABLE IN 120V AND 240V ONLY
E2 IS AVAILABLE IN 120V OR 277V ONLY

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
A0-SERIES	3" DIA. x 4-3/4" H. (STEPPED CYLINDER)	A3-SERIES	3" DIA. x 4-3/4" H. (STEPPED CYLINDER)
<i>A01 ZOOM</i> <i>STATIC WHITE</i> A01L1800 A01L1300 A01L1600 A01L1100	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI	<i>A3Z ZOOM</i> <i>STATIC WHITE</i> A3Z-L18 A3Z-L13 A3Z-L16 A3Z-L11	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI
	3" DIA. x 5-5/8" H. (STEPPED CYLINDER)		3" DIA. x 5-5/8" H. (STEPPED CYLINDER)
<i>A02 WALLWASH</i> <i>STATIC WHITE</i> A02L1800 A02L1300 A02L1600 A02L1100	WW UP TO 1800 LUMENS UP TO 98 CRI	<i>A3W WALLWASH</i> <i>STATIC WHITE</i> A3W-L18 A3W-L13 A3W-L16 A3W-L11	WW UP TO 1800 LUMENS UP TO 98 CRI
<i>A02 WALLWASH</i> <i>DIM-TO-WARM</i> A02L600	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>A3W WALLWASH</i> <i>DIM-TO-WARM</i> A3W-L06	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A02 WALLWASH</i> <i>TUNABLE WHITE</i> A03L1000	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>A3W WALLWASH</i> <i>TUNABLE WHITE</i> A3W-L10	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
	3" DIA. x 4-3/4" H. (STEPPED CYLINDER)		3" DIA. x 4-3/4" H. (STEPPED CYLINDER)
<i>A03 FIXED OPTIC</i> <i>STATIC WHITE</i> A03L1800 A03L1300 A03L1600 A03L1100	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI	<i>A30 FIXED OPTIC</i> <i>STATIC WHITE</i> A30-L18 A30-L13 A30-L16 A30-L11	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI
<i>A03 FIXED OPTIC</i> <i>DIM-TO-WARM</i> A03L600	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>A30 FIXED OPTIC</i> <i>DIM-TO-WARM</i> A30-L06	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
A0-SERIES (CONTINUED)	3" DIA. x 4-3/4" H. (STEPPED CYLINDER)	A3-CONTINUED	3" DIA. x 4-3/4" H. (STEPPED CYLINDER)
<i>A03 FIXED OPTIC TUNABLE WHITE A03L1000</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>A30 FIXED OPTIC TUNABLE WHITE A30-L10</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
<i>A04 FRAMING PROJ. STATIC WHITE A04L1800 A04L1300 A04L1600 A04L1100</i>	3" DIA. x 12" H. (MAX.) (STEPPED CYLINDER) FP UP TO 1800 LUMENS UP TO 98 CRI	<i>A3P FRAMING PROJ. STATIC WHITE A3P-L18 A3P-L13 A3P-L16 A3P -L11</i>	3" DIA. x 12" H. (MAX.) (STEPPED CYLINDER) FP UP TO 1800 LUMENS UP TO 98 CRI
<i>A05 VERY NARROW SPOT STATIC WHITE A05L800 A05L650</i>	3" DIA. x 4-3/4" H. (STEPPED CYLINDER) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI	<i>A3S VERY NARROW SPOT STATIC WHITE A3S-L08 A3S-L06</i>	3" DIA. x 4-3/4" H. (STEPPED CYLINDER) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI

FRAMING PROJECTOR ACCESSORIES:	
64506	11° FOCUS TUBE
64506-01	22° FOCUS TUBE
64506-02	33° FOCUS TUBE
64506-03	54° FOCUS TUBE
64522-KIT	GOBO PIN-SPOT KIT
CUSTOM GOBO DESIGN AVAILABLE	
ACCESSORY SIZE CODE:	G

ACCESSORIES TYPE:	PRODUCT CODE:
LINEAR SPREAD LENSES:	OL-10x40-(SIZE CODE) OL-10x60-(SIZE CODE)
UNIVERSAL SPREAD LENS:	OL-30X60-(SIZE CODE)
TEXTURED DIFFUSION LENS:	OL-TD-(SIZE CODE)
POLYCARBONATE DIFFUSION LENS:	OL-DF-(SIZE CODE)
HEXCELL LOUVER:	LVH/(SIZE CODE)
NOTE: LITELAB PROVIDES AN ARRAY OF OPTICAL MEDIA, INCLUDING COLOR SHIFTING LENSES, CUSTOM LINEAR SPREAD, DIFFUSION AND UNIVERSAL SPREAD OPTIONS, UV FILTERS AND OTHER MEDIA, ALL TO SPECIFICATION. WHEN SPECIFYING CUSTOM MEDIA, PLEASE INDICATE THE APPROPRIATE LEE FILTER OR ROSCO CODE, OR PROVIDE CLEAR PERFORMANCE PARAMETERS, AND WE WILL FIND THE APPROPRIATE SOLUTION FOR YOUR DESIRED EFFECT.	

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
C8-SERIES	2-3/8" DIA. x 4-1/2" H. (STRAIGHT CYLINDER)	C2-SERIES	2-3/8" DIA. x 4-1/2" H. (STRAIGHT CYLINDER)
<i>C82 WALLWASH STATIC WHITE C82L1600 C82L1400</i>	WW UP TO 1600 LUMENS UP TO 98 CRI	<i>C2W WALLWASH STATIC WHITE C2W-L18 C2W-L13</i>	WW UP TO 1800 LUMENS UP TO 98 CRI
<i>C82 WALLWASH DIM-TO-WARM C82L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>C2W WALLWASH DIM-TO-WARM C2W-L06</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>C82 WALLWASH TUNABLE WHITE C82L1000</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>C2W WALLWASH TUNABLE WHITE C2W-L10</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
<i>C83 FIXED OPTIC STATIC WHITE C83L1600 C83L1400</i>	2-3/8" DIA. x 4-3/4" H. (STRAIGHT CYLINDER) 15°, 25°, 35° LENS UP TO 1600 LUMENS UP TO 98 CRI	<i>C20 FIXED OPTIC STATIC WHITE C20-L16 C20-L14</i>	2-3/8" DIA. x 4-3/4" H. (STRAIGHT CYLINDER) 15°, 25°, 35° LENS UP TO 1600 LUMENS UP TO 98 CRI
<i>C83 FIXED OPTIC DIM-TO-WARM C83L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>C20 FIXED OPTIC DIM-TO-WARM C20-L06</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>C83 FIXED OPTIC TUNABLE WHITE C83L1000</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>C20 FIXED OPTIC TUNABLE WHITE C20-L10</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
<i>C85 VERY NARROW SPOT STATIC WHITE C85L650</i>	2-3/8" DIA. x 4-3/4" H. (STRAIGHT CYLINDER) VNS 6° SPOT UP TO 650 LUMENS UP TO 90 CRI	<i>C2S VERY NARROW SPOT STATIC WHITE C2S-L06</i>	2-3/8" DIA. x 4-3/4" H. (STRAIGHT CYLINDER) VNS 6° SPOT UP TO 650 LUMENS UP TO 90 CRI

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
C7-SERIES	3" DIA. x 4-7/8" H. (STRAIGHT CYLINDER)	C3-SERIES	3" DIA. x 4-7/8" H. (STRAIGHT CYLINDER)
<i>C71 ZOOM</i> <i>STATIC WHITE</i> C71L1800 C71L1300 C71L1600 C71L1100	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI	<i>C3Z ZOOM</i> <i>STATIC WHITE</i> C3Z-L18 C3Z-L13 C3Z-L16 C3Z-L11	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI
<i>C72 WALLWASH</i> <i>STATIC WHITE</i> C72L1800 C72L1300 C72L1600 C72L1100	3" DIA. x 5-5/8" H. (STRAIGHT CYLINDER) WW UP TO 1800 LUMENS UP TO 98 CRI	<i>C3W WALLWASH</i> <i>STATIC WHITE</i> C3W-L18 C3W-L13 C3W-L16 C3W-L11	3" DIA. x 5-5/8" H. (STRAIGHT CYLINDER) WW UP TO 1800 LUMENS UP TO 98 CRI
<i>C72 WALLWASH</i> <i>DIM-TO-WARM</i> C72L600	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>C3W WALLWASH</i> <i>DIM-TO-WARM</i> C3W-L06	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>C72 WALLWASH</i> <i>TUNABLE WHITE</i> C72L1000	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>C3W WALLWASH</i> <i>TUNABLE WHITE</i> C3W-L10	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
<i>C73 FIXED OPTIC</i> <i>STATIC WHITE</i> C73L1800 C73L1300 C73L1600 C73L1100	3" DIA. x 4-7/8" H. (STRAIGHT CYLINDER) 10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI	<i>C30 FIXED OPTIC</i> <i>STATIC WHITE</i> C30-L18 C30-L13 C30-L16 C30-L11	3" DIA. x 4-7/8" H. (STRAIGHT CYLINDER) 10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI
<i>C73 FIXED OPTIC</i> <i>DIM-TO-WARM</i> C73L600	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>C30 FIXED OPTIC</i> <i>DIM-TO-WARM</i> C30-L06	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
C7-SERIES (CONTINUED)	3" DIA. x 4-7/8" H. (STRAIGHT CYLINDER)	C3-SERIES (CONTINUED)	3" DIA. x 4-7/8" H. (STRAIGHT CYLINDER)
<i>C73 FIXED OPTIC TUNABLE WHITE C73L1000</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>C30 FIXED OPTIC TUNABLE WHITE C30-L10</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
<i>C74 FRAMING PROJ. STATIC WHITE C74L1800 C74L1300 C74L1600 C74L1100</i>	3" DIA. x 12" H. (MAX.) (STRAIGHT CYLINDER) FP UP TO 1800 LUMENS UP TO 98 CRI	<i>C3P FRAMING PROJ. STATIC WHITE C3P-L18 C3P-L13 C3P-L16 C3P-L11</i>	3" DIA. x 12" H. (MAX.) (STRAIGHT CYLINDER) FP UP TO 1800 LUMENS UP TO 98 CRI
<i>C75 VERY NARROW SPOT STATIC WHITE C75L800 C75L650</i>	3" DIA. x 4-7/8" H. (STRAIGHT CYLINDER) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI	<i>C3S VERY NARROW SPOT STATIC WHITE C3S-L08 C3S-L06</i>	3" DIA. x 4-7/8" H. (STEPPED CAN) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI

FRAMING PROJECTOR ACCESSORIES:	
64506	11° FOCUS TUBE
64506-01	22° FOCUS TUBE
64506-02	33° FOCUS TUBE
64506-03	54° FOCUS TUBE
64522-KIT	GOBO PIN-SPOT KIT
CUSTOM GOBO DESIGN AVAILABLE	
ACCESSORY SIZE CODES:	
C2-	A
C3-	G

ACCESSORIES TYPE:	PRODUCT CODE:
LINEAR SPREAD LENSES:	OL-10x40-(SIZE CODE) OL-10x60-(SIZE CODE)
UNIVERSAL SPREAD LENS:	OL-30X60-(SIZE CODE)
TEXTURED DIFFUSION LENS:	OL-TD-(SIZE CODE)
POLYCARBONATE DIFFUSION LENS:	OL-DF-(SIZE CODE)
HEXCELL LOUVER:	LVH/(SIZE CODE)
NOTE:	
LITELAB PROVIDES AN ARRAY OF OPTICAL MEDIA, INCLUDING COLOR SHIFTING LENSES, CUSTOM LINEAR SPREAD, DIFFUSION AND UNIVERSAL SPREAD OPTIONS, UV FILTERS AND OTHER MEDIA, ALL TO SPECIFICATION. WHEN SPECIFYING CUSTOM MEDIA, PLEASE INDICATE THE APPROPRIATE LEE FILTER OR ROSCO CODE, OR PROVIDE CLEAR PERFORMANCE PARAMETERS, AND WE WILL FIND THE APPROPRIATE SOLUTION FOR YOUR DESIRED EFFECT.	

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
X0-SERIES	3" DIA. x 7-5/8" H. (STRAIGHT CYLINDER)	C3-SERIES	3" DIA. x 7-5/8" H. (STRAIGHT CYLINDER)
<i>X02 WALLWASH</i> <i>STATIC WHITE</i> X02L2000 X02L1400	WW UP TO 2000 LUMENS UP TO 95 CRI	<i>C3W WALLWASH</i> <i>STATIC WHITE</i> C3W-L20 C3W-L14	WW UP TO 2000 LUMENS UP TO 95 CRI
ACCESSORY SIZE CODE: G		ACCESSORY SIZE CODE: G	
	3" DIA. x 7" H. (STRAIGHT CYLINDER)		3" DIA. x 7" H. (STRAIGHT CYLINDER)
<i>X03 FIXED OBJECT</i> <i>STATIC WHITE</i> X03L2000 X03L1400	10°, 22°, 33° LENS UP TO 2000 LUMENS UP TO 95 CRI	<i>C30 FIXED OBJECT</i> <i>STATIC WHITE</i> C30-L20 C30-L14	FIXED OBJECT UP TO 2000 LUMENS UP TO 95 CRI
M5-SERIES	5-1/2" DIA. x 7" H. (STRAIGHT CYLINDER)	C5-SERIES	5-1/5" DIA. x 7" H. (STRAIGHT CYLINDER)
<i>M55 FIXED OPTIC</i> <i>STATIC WHITE</i> M55L3000	20°, 40°, 60° LENS UP TO 3000 LUMENS UP TO 95 CRI	<i>C50 FIXED OPTIC</i> <i>STATIC WHITE</i> C50-L30	20°, 40°, 60° LENS UP TO 3000 LUMENS UP TO 95 CRI
<i>M56 WALLWASH</i> <i>STATIC WHITE</i> M56L3000	WW UP TO 3000 LUMENS UP TO 95 CRI	<i>C5W WALLWASH</i> <i>STATIC WHITE</i> C5W-L30	WW UP TO 3000 LUMENS UP TO 95 CRI
M9-SERIES	5-1/2" DIA. x 8-1/2" H. (STRAIGHT CYLINDER)	C5-SERIES	5-1/5" DIA. x 8-1/2" H. (STRAIGHT CYLINDER)
<i>M97 FIXED OPTIC</i> <i>STATIC WHITE</i> M97L3900 M97L4200 M97L4500	22°, 33°, 51°, 70° LENS 3900-4500 LUMENS UP TO 92 CRI	<i>C50 FIXED OPTIC</i> <i>STATIC WHITE</i> C50-L399227 C50-L429230 C50-L499235	22°, 33°, 51°, 70° LENS 3900-4500 LUMENS UP TO 92 CRI
<i>M98 WALLWASH</i> <i>STATIC WHITE</i> M98L3900 M98L4200 M98L4500	WW 3900-4500 LUMENS UP TO 92 CRI	<i>C5W WALLWASH</i> <i>STATIC WHITE</i> C5W-L399227 C5W-L429230 C5W-L499235	WW 3900-4500 LUMENS UP TO 92 CRI
ACCESSORY SIZE CODE: P		ACCESSORY SIZE CODE: P	

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
M7-SERIES	8" Sq. x 12" H. (RECTANGULAR FORMAT)	R8-SERIES	8" Sq. x 12" H. (RECTANGULAR FORMAT)
<i>M78 WALLWASH</i> <i>STATIC WHITE</i> M78L13K	WW UP TO 12,800 LUMENS UP TO 92 CRI	<i>R8W WALLWASH</i> <i>STATIC WHITE</i> R8W-L12	WW UP TO 12,800 LUMENS UP TO 92 CRI
ALS - RECESSED SLOT LUMINAIRES		ALS - RECESSED SLOT LUMINAIRES	
<i>H02</i>		<i>H02</i>	
A6-SERIES	3" DIA. x 7-1/8" H. (STEPPED CYLINDER w/ YOKE)	Y3-SERIES	3" DIA. x 7-1/8" H. (STEPPED CYLINDER w/ YOKE)
<i>A67 ZOOM</i> <i>STATIC WHITE</i> A67L1800 A67L1300 A67L1600 A67L1100	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI	<i>Y3Z ZOOM</i> <i>STATIC WHITE</i> Y3Z-L18 Y3Z-L13 Y3Z-L16 Y3Z-L11	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI
	3" DIA. x 8-1/2" H. (STEPPED CYLINDER w/ YOKE)		3" DIA. x 8-1/2" H. (STEPPED CYLINDER w/ YOKE)
<i>A68 WALLWASH</i> <i>STATIC WHITE</i> A68L1800 A68L1300 A68L1600 A68L1100	WW UP TO 1800 LUMENS UP TO 98 CRI	<i>Y3W WALLWASH</i> <i>STATIC WHITE</i> Y3W-L18 Y3W-L13 Y3W-L16 Y3W-L11	WW UP TO 1800 LUMENS UP TO 98 CRI
<i>A68 WALLWASH</i> <i>DIM-TO-WARM</i> A68L600	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>Y3W WALLWASH</i> <i>DIM-TO-WARM</i> Y3W-L06	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A68 WALLWASH</i> <i>TUNABLE WHITE</i> A68L1000	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>Y3W WALLWASH</i> <i>TUNABLE WHITE</i> Y3W-L10	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
A6-SERIES (CONTINUED)	3" DIA. x 7-1/8" H. (STEPPED CYLINDER w/ YOKE)	Y3-SERIES (CONTINUED)	3" DIA. x 7-1/8" H. (STEPPED CYLINDER w/ YOKE)
<i>A69 FIXED OPTIC STATIC WHITE A69L1800 A69L1300 A69L1600 A69L1100</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI	<i>Y30 FIXED OPTIC STATIC WHITE Y30-L18 Y30-L13 Y30-L16 Y30-L11</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI
<i>A69 FIXED OPTIC DIM-TO-WARM A69L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>Y30 FIXED OPTIC DIM-TO-WARM Y30-L06</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A69 FIXED OPTIC TUNABLE WHITE A69L1000</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>Y30 FIXED OPTIC TUNABLE WHITE Y30-L10</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
<i>N/A VERY NARROW SPOT STATIC WHITE</i>	3" DIA. x 7-1/8" H. (STEPPED CYLINDER w/ YOKE) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI	<i>Y3S VERY NARROW SPOT STATIC WHITE Y3S-L80 Y3S-L65</i>	3" DIA. x 7-1/8" H. (STEPPED CYLINDER w/ YOKE) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI
<i>H06</i>		<i>H06</i>	
A7-SERIES	3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)	M3-SERIES	3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)
<i>A71 ZOOM STATIC WHITE A71L1800 A71L1300 A71L1600 A71L1100</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI	<i>M3Z ZOOM STATIC WHITE M3Z-L18 M3Z-L13 M3Z-L16 M3Z-L11</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
A7-SERIES (CONTINUED)	3" DIA. x 6-1/2" H. (MAGNET-MOUNTED STEPPED CYLINDER)	M3-SERIES (CONTINUED)	3" DIA. x 6-1/2" H. (MAGNET-MOUNTED STEPPED CYLINDER)
<i>A72 WALLWASH STATIC WHITE A72L1800 A72L1300 A72L1600 A72L1100</i>	WW UP TO 1800 LUMENS UP TO 98 CRI	<i>M3W WALLWASH STATIC WHITE M3W-L18 M3W-L13 M3W-L16 M3W-L11</i>	WW UP TO 1800 LUMENS UP TO 98 CRI
<i>A72 WALLWASH DIM-TO-WARM A72L600</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>M3W WALLWASH DIM-TO-WARM M3W-L06</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A72 WALLWASH TUNABLE WHITE A72L1000</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>M3W WALLWASH TUNABLE WHITE M3W-L10</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
	3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)		3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)
<i>A73 FIXED OPTIC STATIC WHITE A73L1800 A73L1300 A73L1600 A73L1100</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI	<i>M30 FIXED OPTIC STATIC WHITE M30-L18 M30-L13 M30-L16 M30-L11</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI
<i>A73 FIXED OPTIC DIM-TO-WARM A73L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>M30 FIXED OPTIC DIM-TO-WARM M30-L06</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A73 FIXED OPTIC TUNABLE WHITE A73L1000</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>M30 FIXED OPTIC TUNABLE WHITE M30-L10</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
A7-SERIES (CONTINUED)	3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)	M3-SERIES (CONTINUED)	3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)
<i>N/A VERY NARROW SPOT STATIC WHITE</i>	VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI	<i>M3S VERY NARROW SPOT STATIC WHITE M3S-L80 M3S-L65</i>	VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI
<i>H09/H10</i>		<i>H09/H10</i>	
A7-SERIES	3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER)	S3-SERIES	3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER)
<i>A75 ZOOM STATIC WHITE A75L1800 A75L1300 A75L1600 A75L1100</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI	<i>S3Z ZOOM STATIC WHITE S3Z-L18 S3Z-L13 S3Z-L16 S3Z-L11</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI
	3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER)		3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER)
<i>A76 WALLWASH STATIC WHITE A76L1800 A76L1300 A76L1600 A76L1100</i>	WW UP TO 1800 LUMENS UP TO 98 CRI	<i>S3W WALLWASH STATIC WHITE S3W-L18 S3W-L13 S3W-L16 S3W-L11</i>	WW UP TO 1800 LUMENS UP TO 98 CRI
<i>A76 WALLWASH DIM-TO-WARM A76 L600</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>S3W WALLWASH DIM-TO-WARM S3W-L06</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A76 WALLWASH TUNABLE WHITE A76 L1000</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>S3W WALLWASH TUNABLE WHITE S3W-L10</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
A7-SERIES (CONTINUED)	3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER)	S3-SERIES (CONTINUED)	3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER)
<i>A77 FIXED OPTIC STATIC WHITE A77L1800 A77L1300 A77L1600 A77L1100</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI	<i>S30 FIXED OPTIC STATIC WHITE S30-L18 S30-L13 S30-L16 S30-L11</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI
<i>A77 FIXED OPTIC DIM-TO-WARM A77L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>S30 FIXED OPTIC DIM-TO-WARM S30-L06</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A77 FIXED OPTIC TUNABLE WHITE A77L1000</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>S30 FIXED OPTIC TUNABLE WHITE S30-L10</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
<i>N/A VERY NARROW SPOT STATIC WHITE</i>	3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI	<i>S3S VERY NARROW SPOT STATIC WHITE S3S-L80 S3S-L65</i>	3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI