

INTRODUCTION TO LITELAB CATALOG CODES

INTRODUCTION

LIKE ANY MANUFACTURER WITH A LONG HISTORY AND A DYNAMIC PRODUCT OFFERING, LITELAB HAS USED A VARIETY OF MODEL NUMBERING AND CATALOG CODE SYSTEMS. EACH SYSTEM WAS UNIQUELY ADAPTED TO THE PRODUCT TYPE AND MARKETING METHODOLOGY OF THE TIME. HOWEVER, OVER TIME THE ORIGINAL SIGNIFICANCE OF OLDER SYSTEMS HAS BECOME CONVOLUTED, OR MALADAPTED TO MORE CURRENT PRODUCT DEVELOPMENT. THE CONSEQUENCE HAS BEEN ILL-FITTING OR INCONSISTENT MODEL AND CATALOG CODE SYSTEMS.

IN RESPONSE TO CHANGES IN OUR PRODUCT OFFERINGS AND FEEDBACK FROM SPECIFIERS, LITELAB HAS REVISED OUR MODEL NUMBERING AND CATALOG CODES TO BE MORE DESCRIPTIVE AND CONSISTENT WITH EMERGING INDUSTRY TRENDS.

THIS SHORT PAMPHLET IS DESIGNED TO HELP YOU NAVIGATE LITELAB'S NEW MODEL NUMBERING AND CATALOG CODE SYSTEMS, TO DRAW EQUIVALENCES WITH THE OLDER SYSTEMS, AND TO EXPLAIN THE LOGIC BEHIND THE NEW ONES. IT CAN BE USED TO MAP OLDER MODEL NUMBERS AND CATALOG CODES TO NEW ONES, GENERATE NEW CATALOG CODES FOR SPECIFYING AND ORDERING LITELAB PRODUCT, OR DECIPHER NEW CODES AS NEEDED.

IF YOU HAVE ANY QUESTIONS REGARDING THIS PAMPHLET OR ITS SUBJECT MATTER, PLEASE CONTACT YOUR REGIONAL SALES MANAGER. A LIST OF REGIONAL SALES MANAGERS AND THEIR TERRITORIES IS INCLUDED ON THIS PAGE, AND APPEARS ON OUR WEBSITE: WWW.LITELAB.COM.

FOR YOUR CONVENIENCE, ALL WEBSITE ADDRESSES AND STANDARD PRODUCT CODES HAVE BEEN HYPERLINKED TO OUR WEBSITE, FROM WHICH SUBMITTALS, PHOTOMETRIC FILES AND OTHER RESOURCES CAN BE DOWNLOADED. IF YOU CANNOT FIND WHAT YOU ARE LOOKING FOR, PLEASE CONTACT US OR YOUR LOCAL REPRESENTATIVE.

TABLE OF CONTENTS

- ANATOMY OF LITELAB CATALOG CODES
- UNDERSTANDING THE NEW MODEL NUMBERS
- UNDERSTANDING THE NEW FITTER CODES
- ADVANTAGE LINE / A3 CROSSOVER CODES
- CYLINDER SERIES / C2, C3 & C5 CROSSOVER CODES
- MUSEUM LINE / C5 AND M8 CROSSOVER CODES
- ALS / Y3, M3 & S3 CROSSOVER CODES

MODEL NUMBER CONVERTER:

<input type="text"/>	<input type="text"/>
NEW MODEL NUMBER	OLD MODEL NUMBER

<input type="text"/>	<input type="text"/>
OLD MODEL NUMBER	NEW MODEL NUMBER


LITELAB CONTACTS

RICK SPAULDING
P. 716.270.4524 | E. SPAULDINGR@LITELAB.COM
 INTERNATIONAL SALES, WASHINGTON D.C., ATLANTA, GA & MIAMI, FL

ZACHARY SPAULDING
P. 716.270.4516 | E. SPAULDINGZ@LITELAB.COM
 NEW YORK, CONNECTICUT, MASSACHUSETTS

SARAH KRAFT
P. 716.270.4513 | E. KRAFTS@LITELAB.COM
 PACIFIC AND MOUNTAIN STATES, TEXAS

MARY WELGS
P. 716.536.7272 | E. WELGSM@LITELAB.COM
 NEW YORK, MID-ATLANTIC, SOUTH-EAST & CENTRAL STATES



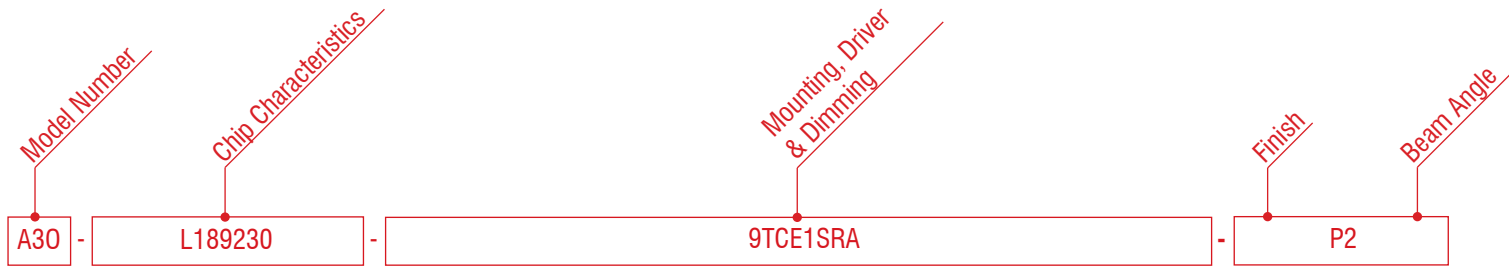


Model	Lumens/CRI	CCT	Adaptor	Dimming	Level	Options	Voltage	Finish	Optics
A30	L18 1800/92	27 2700	9TC BusRun Clipless	E ELV	1 1%	P Potentiometer	A 120	P White	1 10°
	L15 1550/98	30 3000	9TD BusRun Deep		0 10%	R* Rotation Lock	D 240	MB Black	2 20°
	L13 1300/92	35 3500	9TS BusRun Shallow			S Switch	F* 240	BR Brushed	3 30°
	L11 1100/98	40 4000				SP Switch w/ Potentiometer	C 277	CP Custom	
			9HC BusRun Clipless w/ Driverbox	E ELV	0 10%	SR* Switch w/ Rotation Lock			
			9HD BusRun Deep w/ Driverbox	W Wire-less	C Casambi				
			9HS BusRun Shallow w/ Driverbox		A Avi-On				
			BT Basic Track		Z Zigbee				
					V Lutron				
					H HiLume				
			E1 1-Circuit Eutrac	E ELV	0 10%				
			E2 2-Circuit Eutrac (120 volt Only)	Z 0-10	D Dark				
			E3 3-Circuit Eutrac (240 volt Only)	M DMX					
			3L 5" Canopy	D DALI					
			5L 3.5" QC Canopy	L Lutron	H HiLume				

Note: All attributes in this example are specific to the A30 Static White fixture, and may change based on luminaire.

* Rotation Lock and type "F" voltage are exclusive to 9T Fitters.
Rotation Lock not available with Potentiometer.


ENTER RAL OR OTHER FINISH CODE

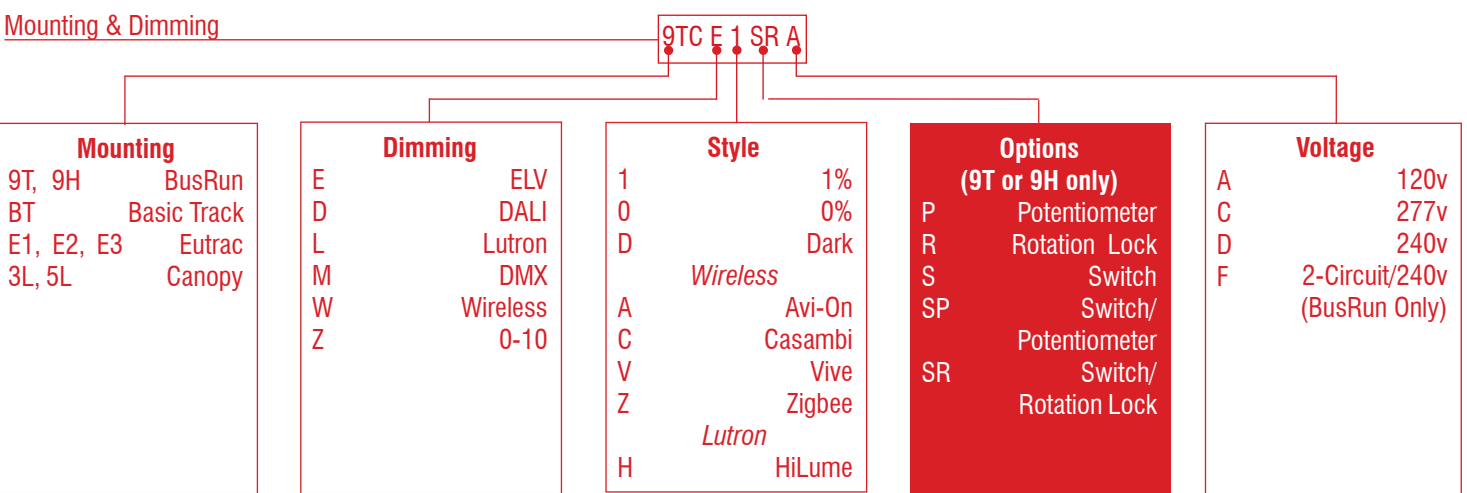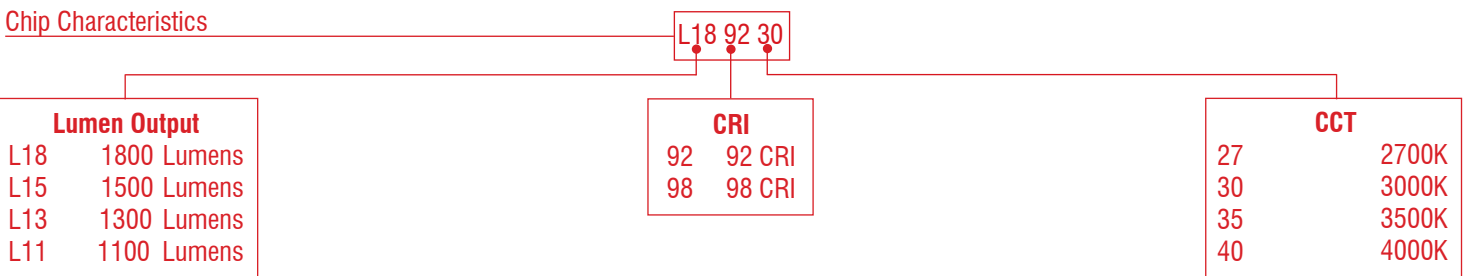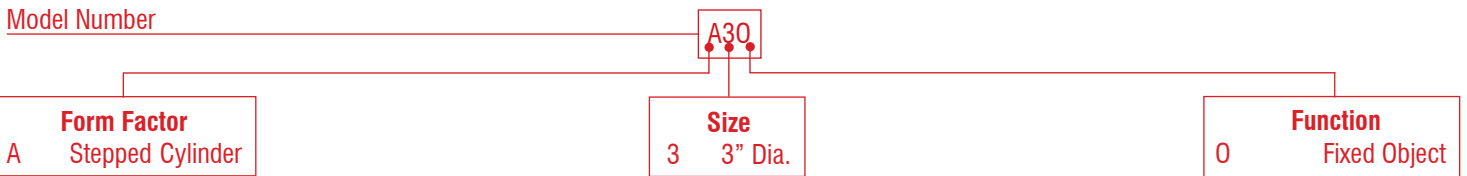

MODEL NUMBERS

LITELAB'S NEW MODEL NUMBERING SYSTEM CONSISTS OF A BASE SET OF THREE CHARACTERS EACH REPRESENTING FORM, SIZE AND FUNCTION RESPECTIVELY. THIS IS FOLLOWED BY A SOURCE CHARACTERISTIC CLUSTER. TOGETHER, THESE CODES WILL DESIGNATE THE FIXTURE TYPE AND PERFORMANCE PROFILE OF THE LUMINAIRE.

WE HAVE KEPT CERTAIN ASPECTS OF THE MODEL NUMBERS AND CHARACTERISTIC CLUSTER CONSISTENT WITH PREVIOUS SYSTEMS FOR THE SAKE OF FAMILIARITY.

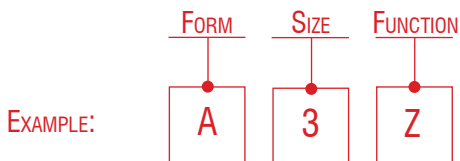

FORM

SURFACE MOUNTED LUMINAIRES

A	STEPPED CYLINDER
C	CYLINDER
R	RECTANGULAR

RECESSED ADJUSTABLE LUMINAIRES

Y	YOKE-MOUNTED (H02)
M	MAGNET-MOUNTED (H06)
S	STEM-MOUNTED (H09/H10)

SIZE

2	2-3/8" MAX.
3	3-1/8" MAX.
4	4-1/2" MAX.
5	5-1/2" MAX.
8	8" MAX.


FUNCTION

O	FIXED OBJECT
P	FRAMING PROJECTOR
S	PIN SPOT
W	WALLWASHER
Z	ZOOM

SOURCE CHARACTERISTICS

THE SECOND CLUSTER THAT APPEARS IN LITELAB'S NEW CATALOG CODE IS THE SOURCE CHARACTERISTIC CLUSTER. THIS IS A MAXIMUM SEVEN-CHARACTER CODE THAT PROVIDES INFORMATION REGARDING THE LUMINAIRE'S SOURCE.

PLEASE NOTE THAT THERE MAY BE MULTIPLE SOURCE CHARACTERISTIC CODES ASSOCIATED WITH A MODEL NUMBER. AS A RESULT, THE SOURCE CHARACTERISTIC CODE IS INSTRUMENTAL IN DIFFERENTIATING PERFORMANCE PROFILES WITHIN A LUMINAIRE LINE.

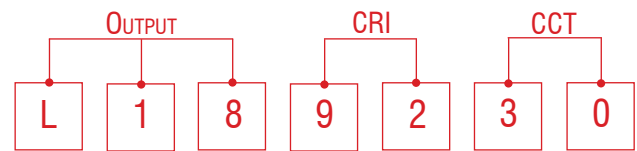

LED EXAMPLE

OUTPUT

*REFLECTS OFFERINGS AVAILABLE AS OF 2021.08.30

L45	4500 LUMENS
L42	4200 LUMENS
L39	3900 LUMENS
L30	3000 LUMENS
L20	2000 LUMENS
L18	1800 LUMENS
L16	1600 LUMENS
L14	1400 LUMENS
L13	1300 LUMENS
L11	1100 LUMENS
L10	1000 LUMENS
L06	600 LUMENS

CRI

90	90 CRI
92	92 CRI
95	95 CRI
98	98 CRI


CCT

27	90 CRI
30	92 CRI
35	95 CRI
40	98 CRI
DL	1800-2700 CCT (DIM-TO-WARM)
DH	1800-3000 CCT (DIM-TO-WARM)
TL	1800-4000 CCT (TUNABLE WHITE)
TH	2700-6500 CCT (TUNABLE WHITE)

FITTER CODES

SINCE THE INTRODUCTION OF LED, THERE HAS BEEN AN INTENSIFICATION OF INTEREST IN ADVANCED CONTROLS. THIS IS IN PART BECAUSE LEDs ARE EASIER TO CONTROL THAN MANY OF THEIR PREDECESSORS, AND IN PART BECAUSE OF NEW DESIGN PARADIGMS THAT EMPHASIZE THE USE OF NETWORKED DIGITAL TECHNOLOGIES TO INCREASE BUILDING EFFICIENCY. IN ADDITION TO ADVANCES IN SENSOR NETWORKS AND ACTUATED LUMINAIRES THAT IS DRIVING THE “SMART BUILDING” REVOLUTION, TUNABLE WHITE AND RGBW COLOR-SHIFTING LEDs ARE ALSO BEING SPECIFIED WITH INCREASED FREQUENCY.

LITELAB HAS UPDATED ALL OF OUR FITTER CODES TO ACCOMODATE THE PROLIFERATION OF ADVANCED CONTROLS IN OUR INDUSTRY. THE NEW FITTER CODES INCLUDE MOST OF THE POPULAR CONTROLS CURRENTLY BEING SPECIFIED AND HAVE BEEN FUTURE PROOFED TO ABSORB EMERGING CONTROLS AS THEY APPEAR ON THE MARKET. THE FITTER CODE IS AN EIGHT CHARACTER CLUSTER THAT INCLUDES THE MOUNTING CONDITION, DIMMING PROTOCOL, DIMMING STYLE, OPTIONS (BASED ON PROTOCOL) AND VOLTAGE. IN ALL INSTANCES, WITH THE EXCEPTION OF ELV, LITELAB USES 0.1% DIMMING DRIVERS.

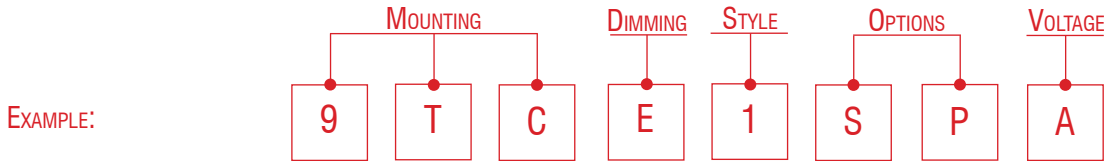

● MOUNTING

- BusRun**
- 9TC FULLY RECESSED POWER SUPPLY / CLIPLESS
 - 9TD FULLY RECESSED POWER SUPPLY / DEEP CLIPS
 - 9TS FULLY RECESSED POWER SUPPLY / SHALLOW CLIPS

 - 9HC EXPOSED DRIVER BOX / CLIPLESS
 - 9HD EXPOSED DRIVER BOX / DEEP CLIPS
 - 9HS EXPOSED DRIVER BOX / SHALLOW CLIPS

BASIC TRACK

 - BT BASIC TRACK FITTER WITH EXPOSED DRIVER BOX

*EUTRAC***

 - E1 1-CIRCUIT EUTRAC FITTER WITH EXPOSED DRIVER BOX
 - E2 2-CIRCUIT EUTRAC FITTER WITH EXPOSED DRIVER BOX
 - E3 1-CIRCUIT EUTRAC FITTER WITH EXPOSED DRIVER BOX

CANOPIES

 - 3L 5" CANOPY
 - 5L 3.5" QUICK CONNECT CANOPY WITH INTEGRAL POWER SUPPLY
 - 7L 2" QUICK CONNECT CANOPY WITH REMOTE POWER SUPPLY

● DIMMING

- E ELV (ELECTRONIC LOW VOLTAGE / REVERSE PHASE
- D DALI
- L LUTRON
- M DMX
- W WIRELESS
- Z 0-10V

● STYLE

- 0 10% DIMMABLE / ELV W/ DRIVER BOX ONLY
- 1 1% DIMMABLE / 9T ELV ONLY
- J JA-8 APPROVED / ELV OR 0-10V ONLY
- D DIM-TO-DARK (0.1%) / 0-10V, DALI & DMX ONLY
- C CASAMBI / WIRELESS ONLY
- A AVI-ON / WIRELESS ONLY
- Z ZIGBEE/ WIRELESS ONLY
- V LUTRON VIVE / WIRELESS ONLY
- H HIGH-LUME / LUTRON ONLY

● OPTIONS

- P POTENTIOMETER / 9T OR 9H ONLY
- R ROTATION LOCK / 9T ONLY
- S SWITCH / 9T OR 9H ONLY
- SP SWITCH & POTENTIOMETER / 9T OR 9H ONLY
- SR SWITCH & ROTATION LOCK / 9T ONLY

● VOLTAGES

- A 120V
- C 277V
- D 240V
- F 2-CIRCUIT 240V / 9T OR 9H ONLY

ADDITIONAL NOTES:

* 9T RECESSED POWER SUPPLY AVAILABLE FOR ELV DIMMING ONLY
9H AVAILABLE FOR ELV OR WIRELESS DIMMING ONLY

**E1 IS AVAILABLE IN 120V AND 240V ONLY
E2 IS AVAILABLE IN 120V OR 277V ONLY

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
A0-SERIES	3" DIA. x 4-3/4" H. (STEPPED CYLINDER)	A3-SERIES	3" DIA. x 4-3/4" H. (STEPPED CYLINDER)
<i>A01 ZOOM STATIC WHITE A01L1800 A01L1300 A01L1600 A01L1100</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI	<i>A3Z ZOOM STATIC WHITE A3Z-L18 A3Z-L13 A3Z-L16 A3Z-L11</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI
	3" DIA. x 5-5/8" H. (STEPPED CYLINDER)		3" DIA. x 5-5/8" H. (STEPPED CYLINDER)
<i>A02 WALLWASH STATIC WHITE A02L1800 A02L1300 A02L1600 A02L1100</i>	WW UP TO 1800 LUMENS UP TO 98 CRI	<i>A3W WALLWASH STATIC WHITE A3W-L18 A3W-L13 A3W-L16 A3W-L11</i>	WW UP TO 1800 LUMENS UP TO 98 CRI
<i>A02 WALLWASH DIM-TO-WARM A02L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>A3W WALLWASH DIM-TO-WARM A3W-L06</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A02 WALLWASH TUNABLE WHITE A03L1000</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>A3W WALLWASH TUNABLE WHITE A3W-L10</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
	3" DIA. x 4-3/4" H. (STEPPED CYLINDER)		3" DIA. x 4-3/4" H. (STEPPED CYLINDER)
<i>A03 FIXED OPTIC STATIC WHITE A03L1800 A03L1300 A03L1600 A03L1100</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI	<i>A30 FIXED OPTIC STATIC WHITE A30-L18 A30-L13 A30-L16 A30-L11</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI
<i>A03 FIXED OPTIC DIM-TO-WARM A03L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>A30 FIXED OPTIC DIM-TO-WARM A30-L06</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
A0-SERIES (CONTINUED)	3" DIA. x 4-3/4" H. (STEPPED CYLINDER)	A3-CONTINUED	3" DIA. x 4-3/4" H. (STEPPED CYLINDER)
<i>A03 FIXED OPTIC TUNABLE WHITE A03L1000</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>A30 FIXED OPTIC TUNABLE WHITE A30-L10</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
<i>A04 FRAMING PROJ. STATIC WHITE A04L1800 A04L1300 A04L1600 A04L1100</i>	3" DIA. x 12" H. (MAX.) (STEPPED CYLINDER) FP UP TO 1800 LUMENS UP TO 98 CRI	<i>A3P FRAMING PROJ. STATIC WHITE A3P-L18 A3P-L13 A3P-L16 A3P-L11</i>	3" DIA. x 12" H. (MAX.) (STEPPED CYLINDER) FP UP TO 1800 LUMENS UP TO 98 CRI
<i>A05 VERY NARROW SPOT STATIC WHITE A05L800 A05L650</i>	3" DIA. x 4-3/4" H. (STEPPED CYLINDER) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI	<i>A3S VERY NARROW SPOT STATIC WHITE A3S-L08 A3S-L06</i>	3" DIA. x 4-3/4" H. (STEPPED CYLINDER) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI

FRAMING PROJECTOR ACCESSORIES:

64506	11° FOCUS TUBE
64506-01	22° FOCUS TUBE
64506-02	33° FOCUS TUBE
64506-03	54° FOCUS TUBE
64522-KIT	GOBO PIN-SPOT KIT
CUSTOM GOBO DESIGN AVAILABLE	
ACCESSORY SIZE CODE:	G

ACCESSORIES TYPE:	PRODUCT CODE:
LINEAR SPREAD LENSES:	OL-10x40-(SIZE CODE) OL-10x60-(SIZE CODE)
UNIVERSAL SPREAD LENS:	OL-30X60-(SIZE CODE)
TEXTURED DIFFUSION LENS:	OL-TD-(SIZE CODE)
POLYCARBONATE DIFFUSION LENS:	OL-DF-(SIZE CODE)
HEXCELL LOUVER:	LVH/(SIZE CODE)
NOTE:	LITELAB PROVIDES AN ARRAY OF OPTICAL MEDIA, INCLUDING COLOR SHIFTING LENSES, CUSTOM LINEAR SPREAD, DIFFUSION AND UNIVERSAL SPREAD OPTIONS, UV FILTERS AND OTHER MEDIA, ALL TO SPECIFICATION. WHEN SPECIFYING CUSTOM MEDIA, PLEASE INDICATE THE APPROPRIATE LEE FILTER OR ROSCO CODE, OR PROVIDE CLEAR PERFORMANCE PARAMETERS, AND WE WILL FIND THE APPROPRIATE SOLUTION FOR YOUR DESIRED EFFECT.

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
C8-SERIES	2-3/8" DIA. x 4-1/2" H. (STRAIGHT CYLINDER)	C2-SERIES	2-3/8" DIA. x 4-1/2" H. (STRAIGHT CYLINDER)
<i>C82 WALLWASH STATIC WHITE C82L1600 C82L1400</i>	WW UP TO 1600 LUMENS UP TO 98 CRI	<i>C2W WALLWASH STATIC WHITE C2W-L18 C2W-L13</i>	WW UP TO 1800 LUMENS UP TO 98 CRI
<i>C82 WALLWASH DIM-TO-WARM C82L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>C2W WALLWASH DIM-TO-WARM C2W-L06</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>C82 WALLWASH TUNABLE WHITE C82L1000</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>C2W WALLWASH TUNABLE WHITE C2W-L10</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
C83 FIXED OPTIC	2-3/8" DIA. x 4-3/4" H. (STRAIGHT CYLINDER)	C20 FIXED OPTIC	2-3/8" DIA. x 4-3/4" H. (STRAIGHT CYLINDER)
<i>C83L1600 C83L1400</i>	15°, 25°, 35° LENS UP TO 1600 LUMENS UP TO 98 CRI	<i>C20L16 C20-L14</i>	15°, 25°, 35° LENS UP TO 1600 LUMENS UP TO 98 CRI
<i>C83 FIXED OPTIC DIM-TO-WARM C83L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>C20L06</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>C83 FIXED OPTIC TUNABLE WHITE C83L1000</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>C20L10</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
C85 VERY NARROW SPOT	2-3/8" DIA. x 4-3/4" H. (STRAIGHT CYLINDER)	C2S VERY NARROW SPOT	2-3/8" DIA. x 4-3/4" H. (STRAIGHT CYLINDER)
<i>C85L650</i>	VNS 6° SPOT UP TO 650 LUMENS UP TO 90 CRI	<i>C2S-L06</i>	VNS 6° SPOT UP TO 650 LUMENS UP TO 90 CRI

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
C7-SERIES	3" DIA. x 4-7/8" H. (STRAIGHT CYLINDER)	C3-SERIES	3" DIA. x 4-7/8" H. (STRAIGHT CYLINDER)
<i>C71 ZOOM STATIC WHITE C71L1800 C71L1300 C71L1600 C71L1100</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI	<i>C3Z ZOOM STATIC WHITE C3Z-L18 C3Z-L13 C3Z-L16 C3Z-L11</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI
	3" DIA. x 5-5/8" H. (STRAIGHT CYLINDER)		3" DIA. x 5-5/8" H. (STRAIGHT CYLINDER)
<i>C72 WALLWASH STATIC WHITE C72L1800 C72L1300 C72L1600 C72L1100</i>	WW UP TO 1800 LUMENS UP TO 98 CRI	<i>C3W WALLWASH STATIC WHITE C3W-L18 C3W-L13 C3W-L16 C3W-L11</i>	WW UP TO 1800 LUMENS UP TO 98 CRI
<i>C72 WALLWASH DIM-TO-WARM C72L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>C3W WALLWASH DIM-TO-WARM C3W-L06</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>C72 WALLWASH TUNABLE WHITE C72L1000</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>C3W WALLWASH TUNABLE WHITE C3W-L10</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
	3" DIA. x 4-7/8" H. (STRAIGHT CYLINDER)		3" DIA. x 4-7/8" H. (STRAIGHT CYLINDER)
<i>C73 FIXED OPTIC STATIC WHITE C73L1800 C73L1300 C73L1600 C73L1100</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI	<i>C30 FIXED OPTIC STATIC WHITE C30-L18 C30-L13 C30-L16 C30-L11</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI
<i>C73 FIXED OPTIC DIM-TO-WARM C73L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>C30 FIXED OPTIC DIM-TO-WARM C30-L06</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT

ORIGINAL MODEL NUMBER

SPECIFICATION

NEW MODEL NUMBER

SPECIFICATION

C7-SERIES (CONTINUED)

*C73 FIXED OPTIC
TUNABLE WHITE
C73L1000*

*C74 FRAMING PROJ.
STATIC WHITE
C74L1800
C74L1300
C74L1600
C74L1100*

*C75 VERY NARROW SPOT
STATIC WHITE
C75L800
C75L650*

**3" DIA. x 4-7/8" H.
(STRAIGHT CYLINDER)**

15°, 25°, 35° LENS
UP TO 1060 LUMENS
UP TO 90 CRI
1800-4000 CCT
2700-6500 CCT

**3" DIA. x 12" H. (MAX.)
(STRAIGHT CYLINDER)**

FP
UP TO 1800 LUMENS
UP TO 98 CRI

**3" DIA. x 4-7/8" H.
(STRAIGHT CYLINDER)**

VNS 6° SPOT
UP TO 835 LUMENS
UP TO 90 CRI

C3-SERIES (CONTINUED)

*C30 FIXED OPTIC
TUNABLE WHITE
C30-L10*

*C3P FRAMING PROJ.
STATIC WHITE
C3P-L18
C3P-L13
C3P-L16
C3P-L11*

*C3S VERY NARROW SPOT
STATIC WHITE
C3S-L08
C3S-L06*

**3" DIA. x 4-7/8" H.
(STRAIGHT CYLINDER)**

15°, 25°, 35° LENS
UP TO 1060 LUMENS
UP TO 90 CRI
1800-4000 CCT
2700-6500 CCT

**3" DIA. x 12" H. (MAX.)
(STRAIGHT CYLINDER)**

FP
UP TO 1800 LUMENS
UP TO 98 CRI

**3" DIA. x 4-7/8" H.
(STEPPED CAN)**

VNS 6° SPOT
UP TO 835 LUMENS
UP TO 90 CRI

FRAMING PROJECTOR ACCESSORIES:

64506	11° FOCUS TUBE
64506-01	22° FOCUS TUBE
64506-02	33° FOCUS TUBE
64506-03	54° FOCUS TUBE

64522-KIT	GOBO PIN-SPOT KIT
-----------	-------------------

CUSTOM GOBO DESIGN AVAILABLE

ACCESSORY SIZE CODES:

C2-	A
C3-	G

ACCESSORIES TYPE:

LINEAR SPREAD LENSES:

UNIVERSAL SPREAD LENS:

TEXTURED DIFFUSION LENS:

POLYCARBONATE DIFFUSION LENS:

HEXCELL LOUVER:

PRODUCT CODE:

OL-10x40-(SIZE CODE)

OL-10x60-(SIZE CODE)

OL-30X60-(SIZE CODE)

OL-TD-(SIZE CODE)

OL-DF-(SIZE CODE)

LVH/(SIZE CODE)

NOTE:

LITELAB PROVIDES AN ARRAY OF OPTICAL MEDIA, INCLUDING COLOR SHIFTING LENSES, CUSTOM LINEAR SPREAD, DIFFUSION AND UNIVERSAL SPREAD OPTIONS, UV FILTERS AND OTHER MEDIA, ALL TO SPECIFICATION. WHEN SPECIFYING CUSTOM MEDIA, PLEASE INDICATE THE APPROPRIATE LEE FILTER OR ROSCO CODE, OR PROVIDE CLEAR PERFORMANCE PARAMETERS, AND WE WILL FIND THE APPROPRIATE SOLUTION FOR YOUR DESIRED EFFECT.

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
<p>X0-SERIES</p> <p><i>X02 WALLWASH</i> <i>STATIC WHITE</i> X02L2000 X02L1400</p> <p>ACCESSORY SIZE CODE: G</p>	<p>3" DIA. x 7-5/8" H. (STRAIGHT CYLINDER)</p> <p>WW UP TO 2000 LUMENS UP TO 95 CRI</p>	<p>C3-SERIES</p> <p><i>C3W WALLWASH</i> <i>STATIC WHITE</i> C3W-L20 C3W-L14</p> <p>ACCESSORY SIZE CODE: G</p>	<p>3" DIA. x 7-5/8" H. (STRAIGHT CYLINDER)</p> <p>WW UP TO 2000 LUMENS UP TO 95 CRI</p>
<p><i>X03 FIXED OBJECT</i> <i>STATIC WHITE</i> X03L2000 X03L1400</p>	<p>3" DIA. x 7" H. (STRAIGHT CYLINDER)</p> <p>10°, 22°, 33° LENS UP TO 2000 LUMENS UP TO 95 CRI</p>	<p><i>C30 FIXED OBJECT</i> <i>STATIC WHITE</i> C30-L20 C30-L14</p>	<p>3" DIA. x 7" H. (STRAIGHT CYLINDER)</p> <p>FIXED OBJECT UP TO 2000 LUMENS UP TO 95 CRI</p>
<p>M5-SERIES</p> <p><i>M55 FIXED OPTIC</i> <i>STATIC WHITE</i> M55L3000</p> <p><i>M56 WALLWASH</i> <i>STATIC WHITE</i> M56L3000</p>	<p>5-1/2" DIA. x 7" H. (STRAIGHT CYLINDER)</p> <p>20°, 40°, 60° LENS UP TO 3000 LUMENS UP TO 95 CRI</p> <p>WW UP TO 3000 LUMENS UP TO 95 CRI</p>	<p>C5-SERIES</p> <p><i>C50 FIXED OPTIC</i> <i>STATIC WHITE</i> C50-L30</p> <p><i>C5W WALLWASH</i> <i>STATIC WHITE</i> C5W-L30</p>	<p>5-1/5" DIA. x 7" H. (STRAIGHT CYLINDER)</p> <p>20°, 40°, 60° LENS UP TO 3000 LUMENS UP TO 95 CRI</p> <p>WW UP TO 3000 LUMENS UP TO 95 CRI</p>
<p>M9-SERIES</p> <p><i>M97 FIXED OPTIC</i> <i>STATIC WHITE</i> M97L3900 M97L4200 M97L4500</p> <p><i>M98 WALLWASH</i> <i>STATIC WHITE</i> M98L3900 M98L4200 M98L4500</p> <p>ACCESSORY SIZE CODE: P</p>	<p>5-1/2" DIA. x 8-1/2" H. (STRAIGHT CYLINDER)</p> <p>22°, 33°, 51°, 70° LENS 3900-4500 LUMENS UP TO 92 CRI</p> <p>WW 3900-4500 LUMENS UP TO 92 CRI</p>	<p>C5-SERIES</p> <p><i>C50 FIXED OPTIC</i> <i>STATIC WHITE</i> C50-L399227 C50-L429230 C50-L499235</p> <p><i>C5W WALLWASH</i> <i>STATIC WHITE</i> C5W-L399227 C5W-L429230 C5W-L499235</p> <p>ACCESSORY SIZE CODE: P</p>	<p>5-1/5" DIA. x 8-1/2" H. (STRAIGHT CYLINDER)</p> <p>22°, 33°, 51°, 70° LENS 3900-4500 LUMENS UP TO 92 CRI</p> <p>WW 3900-4500 LUMENS UP TO 92 CRI</p>

ORIGINAL MODEL NUMBER

SPECIFICATION

NEW MODEL NUMBER

SPECIFICATION

M7-SERIES

M78 WALLWASH
STATIC WHITE
 M78L13K

**8" Sq. x 12" H.
 (RECTANGULAR FORMAT)**

WW
 UP TO 12,800 LUMENS
 UP TO 92 CRI

R8-SERIES

R8W WALLWASH
STATIC WHITE
 R8W-L12

**8" Sq. x 12" H.
 (RECTANGULAR FORMAT)**

WW
 UP TO 12,800 LUMENS
 UP TO 92 CRI

**ALS - RECESSED SLOT
 LUMINAIRES**

H02

A6-SERIES

A67 ZOOM
STATIC WHITE
 A67L1800
 A67L1300
 A67L1600
 A67L1100

**3" DIA. x 7-1/8" H.
 (STEPPED CYLINDER
 w/ YOKE)**

10° - 30° ZOOM
 UP TO 1800 LUMENS
 UP TO 98 CRI

**ALS - RECESSED SLOT
 LUMINAIRES**

H02

Y3-SERIES

Y3Z ZOOM
STATIC WHITE
 Y3Z-L18
 Y3Z-L13
 Y3Z-L16
 Y3Z-L11

**3" DIA. x 7-1/8" H.
 (STEPPED CYLINDER
 w/ YOKE)**

10° - 30° ZOOM
 UP TO 1800 LUMENS
 UP TO 98 CRI

A68 WALLWASH
STATIC WHITE
 A68L1800
 A68L1300
 A68L1600
 A68L1100

WW
 UP TO 1800 LUMENS
 UP TO 98 CRI

Y3W WALLWASH
STATIC WHITE
 Y3W-L18
 Y3W-L13
 Y3W-L16
 Y3W-L11

WW
 UP TO 1800 LUMENS
 UP TO 98 CRI

A68 WALLWASH
DIM-TO-WARM
 A68L600

WW
 UP TO 564 LUMENS
 UP TO 90 CRI
 1800-2700 CCT
 1800-3000 CCT

Y3W WALLWASH
DIM-TO-WARM
 Y3W-L06

WW
 UP TO 564 LUMENS
 UP TO 90 CRI
 1800-2700 CCT
 1800-3000 CCT

A68 WALLWASH
TUNABLE WHITE
 A68L1000

WW
 UP TO 1060 LUMENS
 UP TO 90 CRI
 1800-4000 CCT
 2700-6500 CCT

Y3W WALLWASH
TUNABLE WHITE
 Y3W-L10

WW
 UP TO 1060 LUMENS
 UP TO 90 CRI
 1800-4000 CCT
 2700-6500 CCT

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
A6-SERIES (CONTINUED)	3" DIA. x 7-1/8" H. (STEPPED CYLINDER w/ YOKE)	Y3-SERIES (CONTINUED)	3" DIA. x 7-1/8" H. (STEPPED CYLINDER w/ YOKE)
<i>A69 FIXED OPTIC STATIC WHITE A69L1800 A69L1300 A69L1600 A69L1100</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI	<i>Y30 FIXED OPTIC STATIC WHITE Y30-L18 Y30-L13 Y30-L16 Y30-L11</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI
<i>A69 FIXED OPTIC DIM-TO-WARM A69L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>Y30 FIXED OPTIC DIM-TO-WARM Y30-L06</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A69 FIXED OPTIC TUNABLE WHITE A69L1000</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>Y30 FIXED OPTIC TUNABLE WHITE Y30-L10</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
<i>N/A VERY NARROW SPOT STATIC WHITE</i>	3" DIA. x 7-1/8" H. (STEPPED CYLINDER w/ YOKE) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI	<i>Y3S VERY NARROW SPOT STATIC WHITE Y3S-L80 Y3S-L65</i>	3" DIA. x 7-1/8" H. (STEPPED CYLINDER w/ YOKE) VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI
<i>H06</i>		<i>H06</i>	
A7-SERIES	3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)	M3-SERIES	3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)
<i>A71 ZOOM STATIC WHITE A71L1800 A71L1300 A71L1600 A71L1100</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI	<i>M3Z ZOOM STATIC WHITE M3Z-L18 M3Z-L13 M3Z-L16 M3Z-L11</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
A7-SERIES (CONTINUED)	3" DIA. x 6-1/2" H. (MAGNET-MOUNTED STEPPED CYLINDER)	M3-SERIES (CONTINUED)	3" DIA. x 6-1/2" H. (MAGNET-MOUNTED STEPPED CYLINDER)
<i>A72 WALLWASH STATIC WHITE A72L1800 A72L1300 A72L1600 A72L1100</i>	WW UP TO 1800 LUMENS UP TO 98 CRI	<i>M3W WALLWASH STATIC WHITE M3W-L18 M3W-L13 M3W-L16 M3W-L11</i>	WW UP TO 1800 LUMENS UP TO 98 CRI
<i>A72 WALLWASH DIM-TO-WARM A72L600</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>M3W WALLWASH DIM-TO-WARM M3W-L06</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A72 WALLWASH TUNABLE WHITE A72L1000</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>M3W WALLWASH TUNABLE WHITE M3W-L10</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT
	3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)		3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)
<i>A73 FIXED OPTIC STATIC WHITE A73L1800 A73L1300 A73L1600 A73L1100</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI	<i>M30 FIXED OPTIC STATIC WHITE M30-L18 M30-L13 M30-L16 M30-L11</i>	10°, 22°, 33° LENS UP TO 1800 LUMENS UP TO 98 CRI
<i>A73 FIXED OPTIC DIM-TO-WARM A73L600</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>M30 FIXED OPTIC DIM-TO-WARM M30-L06</i>	15°, 25°, 35° LENS UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A73 FIXED OPTIC TUNABLE WHITE A73L1000</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>M30 FIXED OPTIC TUNABLE WHITE M30-L10</i>	15°, 25°, 35° LENS UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT

ORIGINAL MODEL NUMBER	SPECIFICATION	NEW MODEL NUMBER	SPECIFICATION
A7-SERIES (CONTINUED)	3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)	M3-SERIES (CONTINUED)	3" DIA. x 6" H. (MAGNET-MOUNTED STEPPED CYLINDER)
<i>N/A VERY NARROW SPOT STATIC WHITE</i>	VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI	<i>M3S VERY NARROW SPOT STATIC WHITE M3S-L80 M3S-L65</i>	VNS 6° SPOT UP TO 835 LUMENS UP TO 90 CRI
<i>H09/H10</i>		<i>H09/H10</i>	
A7-SERIES	3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER)	S3-SERIES	3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER)
<i>A75 ZOOM STATIC WHITE A75L1800 A75L1300 A75L1600 A75L1100</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI	<i>S3Z ZOOM STATIC WHITE S3Z-L18 S3Z-L13 S3Z-L16 S3Z-L11</i>	10° - 30° ZOOM UP TO 1800 LUMENS UP TO 98 CRI
	3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER)		3" DIA. x 11-5/8" L. (SIDE STEM-MOUNTED STEPPED CYLINDER)
<i>A76 WALLWASH STATIC WHITE A76L1800 A76L1300 A76L1600 A76L1100</i>	WW UP TO 1800 LUMENS UP TO 98 CRI	<i>S3W WALLWASH STATIC WHITE S3W-L18 S3W-L13 S3W-L16 S3W-L11</i>	WW UP TO 1800 LUMENS UP TO 98 CRI
<i>A76 WALLWASH DIM-TO-WARM A76 L600</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT	<i>S3W WALLWASH DIM-TO-WARM S3W-L06</i>	WW UP TO 564 LUMENS UP TO 90 CRI 1800-2700 CCT 1800-3000 CCT
<i>A76 WALLWASH TUNABLE WHITE A76 L1000</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT	<i>S3W WALLWASH TUNABLE WHITE S3W-L10</i>	WW UP TO 1060 LUMENS UP TO 90 CRI 1800-4000 CCT 2700-6500 CCT

ORIGINAL MODEL NUMBER

SPECIFICATION

NEW MODEL NUMBER

SPECIFICATION

A7-SERIES (CONTINUED)

*A77 FIXED OPTIC
STATIC WHITE
A77L1800
A77L1300
A77L1600
A77L1100*

*A77 FIXED OPTIC
DIM-TO-WARM
A77L600*

*A77 FIXED OPTIC
TUNABLE WHITE
A77L1000*

*N/A VERY NARROW SPOT
STATIC WHITE*

**3" DIA. x 11-5/8" L.
(SIDE STEM-MOUNTED
STEPPED CYLINDER)**

10°, 22°, 33° LENS
UP TO 1800 LUMENS
UP TO 98 CRI

15°, 25°, 35° LENS
UP TO 564 LUMENS
UP TO 90 CRI
1800-2700 CCT
1800-3000 CCT

15°, 25°, 35° LENS
UP TO 1060 LUMENS
UP TO 90 CRI
1800-4000 CCT
2700-6500 CCT

**3" DIA. x 11-5/8" L.
(SIDE STEM-MOUNTED
STEPPED CYLINDER)**

VNS 6° SPOT
UP TO 835 LUMENS
UP TO 90 CRI

S3-SERIES (CONTINUED)

*S30 FIXED OPTIC
STATIC WHITE
S30-L18
S30-L13
S30-L16
S30-L11*

*S30 FIXED OPTIC
DIM-TO-WARM
S30-L06*

*S30 FIXED OPTIC
TUNABLE WHITE
S30-L10*

*S3S VERY NARROW SPOT
STATIC WHITE
S3S-L80
S3S-L65*

**3" DIA. x 11-5/8" L.
(SIDE STEM-MOUNTED
STEPPED CYLINDER)**

10°, 22°, 33° LENS
UP TO 1800 LUMENS
UP TO 98 CRI

15°, 25°, 35° LENS
UP TO 564 LUMENS
UP TO 90 CRI
1800-2700 CCT
1800-3000 CCT

15°, 25°, 35° LENS
UP TO 1060 LUMENS
UP TO 90 CRI
1800-4000 CCT
2700-6500 CCT

**3" DIA. x 11-5/8" L.
(SIDE STEM-MOUNTED
STEPPED CYLINDER)**

VNS 6° SPOT
UP TO 835 LUMENS
UP TO 90 CRI